CATALOG

Professional LED Luminaires

2019/07

Divolight
LIGHTING SOLUTIONS

www.divolight.com

Content

LED Street Light. 2
Cobra Led Series. 3
Paraglider LED Series 4
Parking LED Series 5
Parking slim Series 6
Ti-Rex LED Series 7
Star LED Series 8
Integrated solar street light 9
LED Garden Lamp. 11
LED Corn Bulb Lamps. 14
LED Flood Light. 15
Premium LED Flood Light Series. 16
Round Sport Series 18
Sport Series, rectangular 19
Sport Series, Dynamic 21
Industrial Series. 22
Tunnel Light Series. 23
LED High Bay Light. 24
Poseidon series. 25
Poseidon II series. 26
Pizza Series. 27
Mini Series. 28
Triton Series. 29
Triton II Series. 30
Diamond Series. 31
Linear High-Bay Series. 32
LED Suspended / Surface Mounted Luminaires. 33
Aluminum LED Tri-Proof Series. 34
Mini Industrial LED Tri-Proof Series. 35
Industrial LED Tri-Proof Series. 36
Designo Linkable LED Linear Fixtures. 37
Seamless Linkable LED Linear Fixtures. 38
Waterproof tubes / LED Linear Fixtures. 39
Trunking system LED Linear Fixtures. 40
LED Ceiling Light. 41
LED Ceiling spot Light. 42
LED Track Lamp 44
LED Up & Down Panels 46
LED Recessed Luminaires 47
LED panels. 48
LED Downlights. 53
LED Spot Light. 56
LED Profresh Light 68

LED Street Light

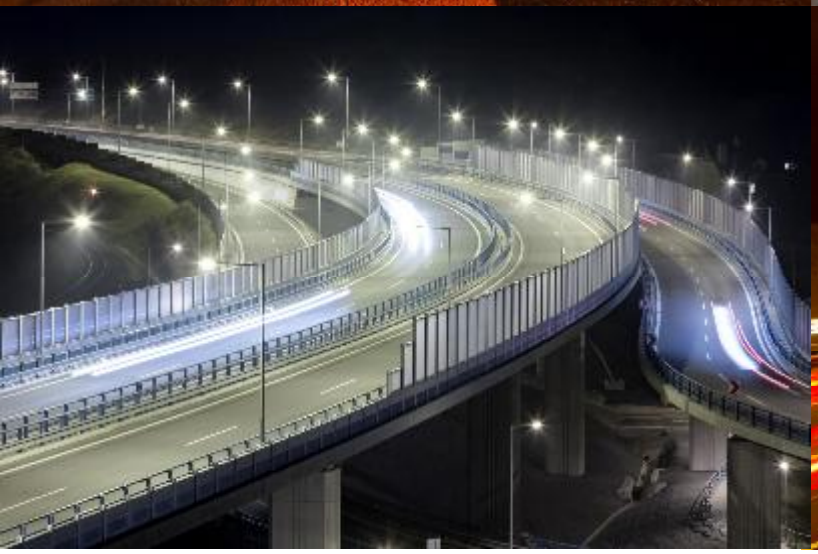

Cobra LED Series





Part number	LED Power	LED Qt'y	Initial Flux	Dimension	Weight	Beam Angle
DVL0541-UUF0036-0020-1	20W	30	2300 Lm	352x437x300 mm	5.5 Kg	100°x140°
DVL0541-UUF0037-0035-1	35W	30	4200 Lm	352x437x300 mm	5.5 Kg	100°x140°
DVL0541-UUF0031-0050-1	50W	70	6000 Lm	352x437x300 mm	6 Kg	100°x140°
DVL0541-UUF0032-0100-1	100W	100	12,000 Lm	352x437x300 mm	6.5 Kg	100°x140°

IP65 | INPUT AC95-265V 50/60 Hz MW MEAN WELL | INPUT AC120-277V 50/60 Hz PHILIPS | PF>95 | -40°~+55° | LED LUMILEDS | 50 000 h | CRI>70 | CRI>80 | 3000K CCT 7000K

Paraglider LED Series

Part number	LED Power	LED Qt'y	Initial Flux	Dimension	Weight	Beam Angle
DVL0541-UUF0038-0035-1	35W	60	4200 Lm	558x400x558 mm	11 Kg	120° / 100°x140°
DVL0541-UUF0039-0050-1	50W	60	6000 Lm	558x400x558 mm	11 Kg	120° / 100°x140°
DVL0541-UUF0040-0100-1	100W	100	12,000 Lm	558x400x558 mm	11.5 Kg	120° / 100°x140°
DVL0541-UUF0033-0150-1	150W	160	18,000 Lm	558x400x558 mm	12 Kg	120° / 100°x140°
DVL0541-UUF0034-0200-1	200W	200	23,000 Lm	558x400x558 mm	12.5 Kg	120° / 100°x140°
DVL0541-UUF0035-0300-1	300W	300	34,500 Lm	558x400x558 mm	13.5 Kg	120° / 100°x140°

IP65 | INPUT AC95-265V 50/60 Hz MEAN WELL | INPUT AC120-277V 50/60 Hz PHILIPS | PF>95 | -40°~+55° | LED LUMILEDS | 50 000 h | CRI>70 | CRI>80 | 3000K CCT 7000K

Parking LED Series

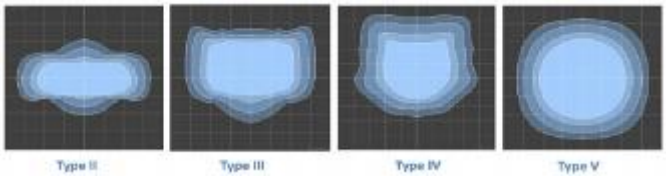

60°x140° 80°x140° 100°x140° 120°

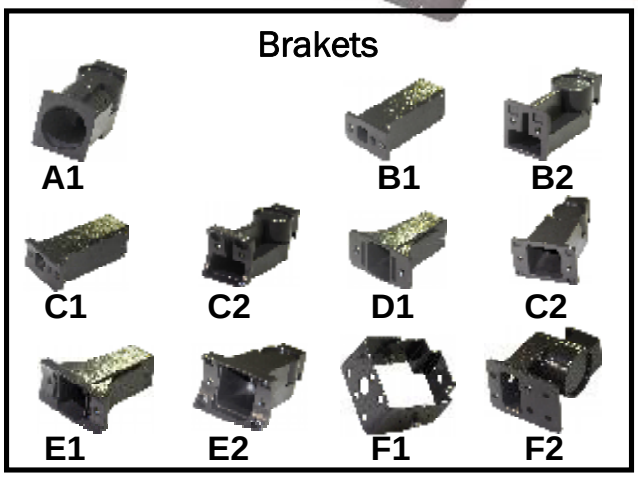

Part number	LED Power	LED	Initial Flux	Dimension	Weight	Beam Angle
DVL0541-UUF0040-0025-1	25W	Lumileds	2650 Lm	275*275*60mm	4.3Kg	Type II,III,V
DVL0541-UUF0041-0050-1	50W	Lumileds	5300 Lm	275*275*60mm	4.5 Kg	Type II,III,V
DVL0541-UUF0042-0080-1	80W	Lumileds	8,800 Lm	343*343*60mm	4.8 Kg	Type III,IV,V
DVL0541-UUF0043-0100-1	100W	Lumileds	11,000 Lm	343*343*60mm	6.8 Kg	Type III,IV,V
DVL0541-UUF0044-0120-1	120W	Lumileds	13,200 Lm	343*432*60mm	6.8 Kg	Type III,V
DVL0541-UUF0045-0150-1	150W	Lumileds	16,500 Lm	343*343*60mm	6.8 Kg	Type III,V
DVL0541-UUF0046-0200-1	200W	Lumileds	22,000 Lm	343*583*60mm	10.6 Kg	Type III,IV,V
DVL0541-UUF0047-0300-1	300W	Lumileds	33,500 Lm	343*583*60mm	10.6 Kg	Type III,V
DVL0541-UUF0048-0400-1	400W	Samsung	44,000 Lm	343*583*112mm	18 Kg	Type III,IV,V
DVL0541-UUF0049-0500-1	500W	Samsung	55,000 Lm	343*583*112mm	18 Kg	Type III,IV,V

IP65 | INPUT AC95-265V 50/60 Hz MW MEAN WELL | PF>95 | -40°~+55° | LED LUMILEDS | LED SAMSUNG | Luminaire EFFICIENCY 110-120 Lm/W | 50 000 h | CRI>70 | 2700K CCT 6500K

Parking Slim Series

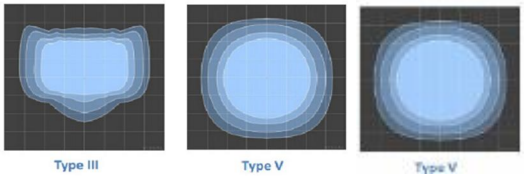

90°x140° 90° 120°

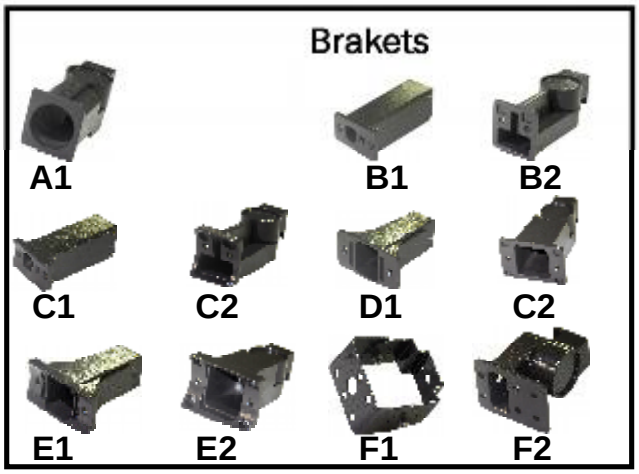

Part number	LED Power	LED	Initial Flux	Dimension	Weight	Beam Angle
DVL0541-UUF0060-0050-1	50W	77 pcs	7000 Lm	520*330*135mm	4.5Kg	Type III,V
DVL0541-UUF0061-0075-1	75W	120 pcs	10,500 Lm	520*330*135mm	4.5 Kg	Type III,V
DVL0541-UUF0062-0100-1	100W	161 pcs	14,000 Lm	580*400*135mm	5.6 Kg	Type III,V
DVL0541-UUF0063-0150-1	150W	240 pcs	21,000 Lm	580*400*135mm	5.7Kg	Type III,V
DVL0541-UUF0064-0200-1	200W	322 pcs.	28,000 Lm	820*400*135mm	8.8 Kg	Type III,V
DVL0541-UUF0065-0300-1	300W	480 pcs	42,000 Lm	820*400*135mm	8.0 Kg	Type III,V



Ti-Rex series

Part No.	Power consumption	Luminous flux	Quantity LED	Size mm	Weight Kg
DVL0588-UUF0001-0060-1	60W	9 000 Lm	28	625*340*155	7.0
DVL0588-UUF0002-0090-1	90W	13 500 Lm	56	700*340*155	7.8
DVL0588-UUF0003-0100-1	100W	15 000 Lm	56	700*340*155	7.8
DVL0588-UUF0004-0120-1	120W	18 000 Lm	56	700*340*155	7.8
DVL0588-UUF0005-0150-1	150W	22 500 Lm	84	775*340*155	8.7
DVL0588-UUF0006-0180-1	180W	27 000 Lm	84	775*340*155	8.7
DVL0588-UUF0007-0200-1	200W	30 000 Lm	112	850*340*155	10.0
DVL0588-UUF0008-0250-1	250W	37 500 Lm	112	850*340*155	11.0
DVL0588-UUF0009-0300-1	300W	45 000 Lm	140	925*340*155	12.0



Divolight
LIGHTING SOLUTIONS

LED Street Light

Star series



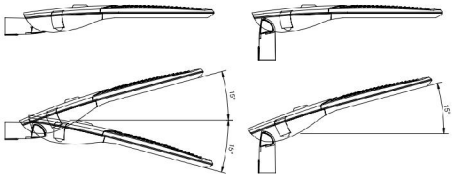

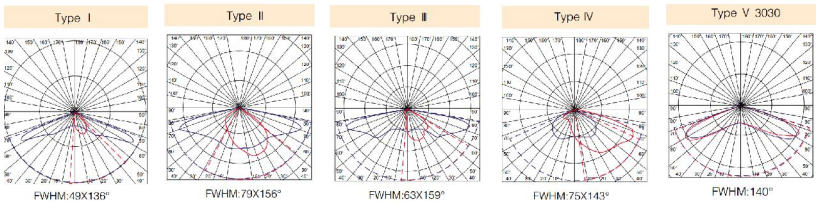

Part No.	Power	Luminous flux	Quantity LED	Size (AxBxC)	Weight
DVL0590-UUF0001-0060-1	60W	7500-8400 Lm	72/36	433x260x128	4.4
DVL0590-UUF0002-0080-1	80W	10000-11200 Lm	112/48	565x330x135	7.3
DVL0590-UUF0003-0100-1	100W	12500-14000 Lm	126/54	700*340*155	7.3
DVL0590-UUF0004-0120-1	120W	15000-16800 Lm	168/72	665x381x131	9.5
DVL0590-UUF0005-0150-1	150W	18750-21000 Lm	168/72	665x381x131	9.5
DVL0590-UUF0006-0180-1	180W	27 000 Lm	84	775*340*155	8.7
DVL0590-UUF0007-0200-1	200W	30 000 Lm	112	850*340*155	10.0
DVL0590-UUF0008-0250-1	250W	37 500 Lm	112	850*340*155	11.0
DVL0590-UUF0009-0300-1	300W	45 000 Lm	140	925*340*155	12.0

IP66 IK09 INPUT AC 90-305V 50/60 Hz INVENTRONICS INPUT AC220-240V 50/60 Hz OSRAM PF>90 -40°~+55° LED LUMILEDS Luminaire EFFICIENCY 125-140 Lm/W 62 000 h CRI>70 CRI>80 2700K CCT 6500K

Integrated Solar Street light

Part No.	Power consumption	Solar battery Power	Luminous flux	Battery	Size mm	Weight Kg
DVL0549-UIUF0001-0013	13W	50W	2000 Lm	Lithium iron phosphate Battery 2000 cycles,15Ah	905×305×80	19
DVL0549-UIUF0002-0020	20W	50W	3000 Lm	Lithium iron phosphate Battery 2000 cycles,18Ah	905×305×80	19
DVL0549-UIUF0003-0027	27W	90W	4000 Lm	Lithium iron phosphate Battery 2000 cycles,27Ah	1295×305×80	21
DVL0549-UIUF0004-0033	33W	90W	5000 Lm	Lithium iron phosphate Battery 2000 cycles, 30Ah	1295×305×80	21
DVL0549-UIUF0005-0040	40W	120W	6000 Lm	Lithium iron phosphate Battery 2000 cycles,42Ah	1700×305×80	23
DVL0549-UIUF0006-0047	47W	120W	7000 Lm	Lithium iron phosphate Battery 2000 cycles , 50Ah	1700×305×80	23
DVL0549-UIUF0008-0053	53W	120W	8000 Lm	Lithium iron phosphate Battery 2000 cycles , 60Ah	1700×305×80	23



Divolight
LIGHTING SOLUTIONS

LED Street Light

Integrated Solar Street light

With microwave sensor ,

100% power on, when somebody come, other time are 30% power on

Part No.	Power	Solar battery	Luminous flux	Battery	Size	Weight
DVL0587-UIUF0001-0015-Lio	15W	25W	1800 Lm	Li-Ion battery 800 cycles 12.5Ah	714*384*120	9.0
DVL0587-UIUF0001-0015-LFP	15W	25W	1800 Lm	Lithium iron phosphate Battery 1600 cycles,12.5Ah	714*384*120	9.8
DVL0587-UIUF0002-0030-Lio	30W	50W	3650 Lm	Li-Ion battery 800 cycles 25Ah	806*446*340	16.0
DVL0587-UIUF0002-0030-LFP	30W	50W	3650 Lm	Lithium iron phosphate Battery 1600 cycles, 25Ah	806*446*340	16.0
DVL0587-UIUF0003-0060-Lio	60W	100W	6850 Lm	Li-Ion battery 800 cycles 25Ah	1200*580*340	23.5
DVL0587-UIUF0003-0060-LFP	60W	100W	6850 Lm	Lithium iron phosphate Battery 1600 cycles , 25Ah	1200*580*340	23.5



LED Garden Lamp

LED Garden Lamp

Roma

LED Power:	30w/45w/60w
LED Qt'y:	30
Luminaire Efficiency :	90-100 Lm/W
CCT:	2700-6000K
Optional With Lamp Holder:	E27 / E40
IP grade:	IP54
Beam Angle:	120°

PN: DVL0574-UUF0001

London

LED Power:	30w/45w/60w
LED Qt'y:	30
Luminaire Efficiency :	90-100 Lm/W
CCT:	2700-6000K
Optional With Lamp Holder:	E27 / E40
IP grade:	IP54
Beam Angle:	120°

PN: DVL0574-UUF0002

Prague

LED Power:	30w/45w/60w
LED Qt'y:	30
Luminaire Efficiency :	90-100 Lm/W
CCT:	2700-6000K
Optional With Lamp Holder:	E27 / E40
IP grade:	IP54
Beam Angle:	120°

PN: DVL0574-UUF0003

Sofia

LED Power:	30w/45w/60w
LED Qt'y:	30
Luminaire Efficiency :	90-100 Lm/W
CCT:	2700-6000K
Optional With Lamp Holder:	E27 / E40
IP grade:	IP54
Beam Angle:	120°

PN: DVL0574-UUF0004



LED Garden Lamp

Torino

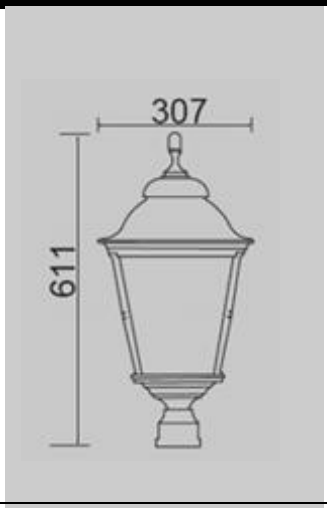

LED Power:	30w/45w/60w
LED Qt'y:	30
Luminaire Efficiency :	90-100 Lm/W
CCT:	2700-6000K
Optional With Lamp Holder:	E27 / E40
IP grade:	IP54
Beam Angle:	120°

PN: DVL0574-UUF0005

Bell



LED Power:	30w/45w/60w
LED Qt'y:	30
Luminaire Efficiency :	90-100 Lm/W
CCT:	2700-6000K
Optional With Lamp Holder:	E27 / E40
IP grade:	IP65
Beam Angle:	120°

PN: DVL0574-UUF0006

Jaffa



LED Power:	30w/45w/60w
LED Qt'y:	30
Luminaire Efficiency :	90-100 Lm/W
CCT:	2700-6000K
Optional With Lamp Holder:	E27 / E40
IP grade:	IP65
Beam Angle:	120°

PN: DVL0574-UUF0007

Gong



LED Power:	30w/45w/60w
LED Qt'y:	30
Luminaire Efficiency :	90-100 Lm/W
CCT:	2700-6000K
Optional With Lamp Holder:	E27 / E40
IP grade:	IP65
Beam Angle:	120°

PN: DVL0574-UUF0008



LED Corn Bulb Lamps

Part number	LED Power	LED Qt'y	Initial Flux	Dimension (D /H)	Socket	Beam Angle
DVL0560-ULK0001-0027-1	27W	81	2950 Lm	93x200 mm	E26/E27/E39/E40	360°
DVL0560-ULK0002-0036-1	36W	108	3870 Lm	93x220 mm	E26/E27/E39/E40	360°
DVL0560-ULK0003-0045-1	45W	135	4980 Lm	93x250 mm	E26/E27/E39/E40	360°
DVL0560-ULK0004-0054-1	54W	162	6020 Lm	93x275 mm	E26/E27/E39/E40	360°
DVL0560-ULK0005-0080-1	80W	240	8140 Lm	118x320 mm	E26/E27/E39/E40	360°
DVL0560-ULK0006-0100-1	100W	288	10,130 Lm	118x340 mm	E26/E27/E39/E40	360°
DVL0560-ULK0007-0120-1	120W	366	12,080 Lm	118x360 mm	E26/E27/E39/E40	360°

LED Flood Light

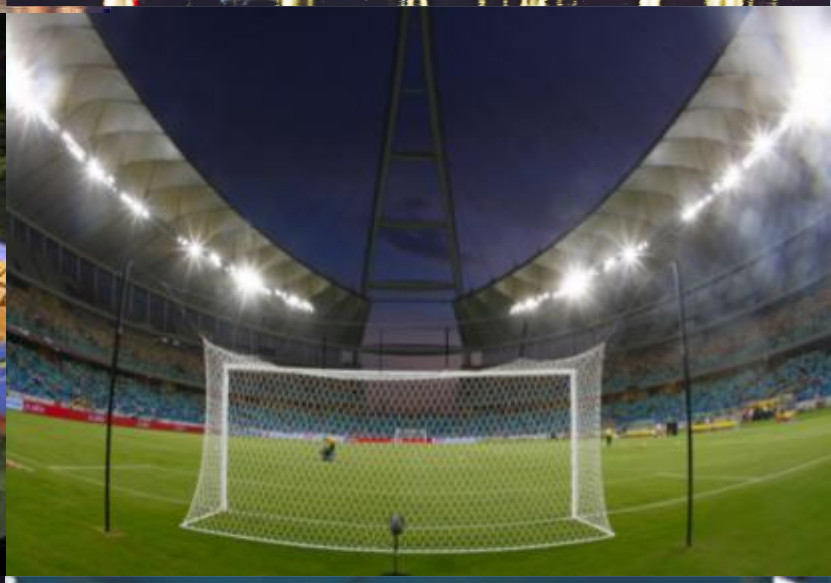

Premium LED Flood Light Series

PHILIPS INSIDE

- Optical Lens Light Distribution
- Super-Efficient Lighting
- Adapted For Rough Environment
- Single Color Or RGB
- Optional DMX Control

IP65 | INPUT AC95-265V 50/60 Hz MW MEAN WELL | PF>95 | LED LUMILEDS | LED SAMSUNG | Luminaire EFFICIENCY 115-150 Lm/W | DALI | 0-10V | PWM | -40°~+50° | >60 000 h | CRI>70 | CRI>80 | CRI>90 | 3000K CCT 7000K

Premium LED Flood Light Series

Part number	LED Power	LED Qt'y	LED Brand	Initial Flux	Beam Angle	Dimension (L / H / W)	Weight
DVL0541-AFL0001-0010-1	10W	5	Samsung	1150 Lm	15° / 30° / 60° / 120° / 60°x135°/85°x135°	128x143x45 mm	0.78 Kg
DVL0541-AFL0003-0030-1	30W	36 15 36	Lumileds (Philips) 3030 Samsung Lumileds Lumileds (Philips) 3030	3500 Lm 3300 Lm RGB/RGBW	30° / 60° / 85°x135° 15° / 30° / 60° / 120° / 60°x135°/85°x135° 30° / 60° / 85°x135°	172x218x49 mm 172x218x49 mm 172x218x49 mm	1.57 Kg 1.57 Kg 1.57 Kg
DVL0541-AFL0004-0050-1	50W	60 26 42 48	Lumileds (Philips) 3030 Samsung Lumileds Lumileds (Philips) 3030	6000 Lm 5500 Lm RGB RGBW	30° / 60° / 85°x135° 15° / 30° / 60° / 120° / 60°x135°/85°x135° 30° / 60° / 85°x135° 30° / 60° / 85°x135°	203x285x60 mm 203x285x60 mm 203x285x60 mm 203x285x60 mm	3.3 Kg 3.3 Kg 3.3 Kg 3.3 Kg
DVL0541-AFL0010-0080-1	80W	100 40 75	Lumileds (Philips) 3030 Samsung Lumileds (Philips) 3030	9600 Lm 8800 Lm RGB	30° / 60° / 85°x135° 15° / 30° / 60° / 120° / 60°x135°/85°x135° 30° / 60° / 85°x135°	247x332x65 mm 247x332x65 mm 247x332x65 mm	4.7 Kg 4.7 Kg 4.7 Kg
DVL0541-AFL0011-0100-1	100W	120 60 105 96	Lumileds (Philips) 3030 Samsung Lumileds (Philips) 3030 Lumileds (Philips) 3030	12,000 Lm 11,000 Lm RGB RGBW	30° / 60° / 85°x135° 15° / 30° / 60° / 120° / 60°x135°/85°x135° 30° / 60° / 85°x135° 30° / 60° / 85°x135°	247x332x65 mm 247x332x65 mm 247x332x65 mm 247x332x65 mm	4.7 Kg 4.7 Kg 4.7 Kg 4.7 Kg
DVL0541-AFL0005-0120-1	120W	60 140 60 120	Lumileds (Philips) 5050 Lumileds (Philips) 3030 Samsung Lumileds (Philips) 3030	16,800 Lm 14,400 Lm 13,200 Lm RGB	15° / 30° / 60° / 120° / 85°x135° 30° / 60° / 85°x135° 15° / 30° / 60° / 120° / 60°x135°/85°x135° 30° / 60° / 85°x135°	298x390x89 mm 298x390x89 mm 298x390x89 mm 298x390x89 mm	7.9 Kg 7.9 Kg 7.9 Kg 7.9 Kg
DVL0541-AFL0012-0140-1	140W	72 140 72	Lumileds (Philips) 5050 Lumileds (Philips) 3030 Samsung	19,000 Lm 16,800 Lm 15,400 Lm	15° / 30° / 60° / 120° / 85°x135° 30° / 60° / 85°x135° 15° / 30° / 60° / 120° / 60°x135°/85°x135°	298x390x89 mm 298x390x89 mm	7.9 Kg 7.9 Kg
DVL0541-AFL0006-0180-1	180W	210 90 180	Lumileds (Philips) 3030 Samsung Lumileds (Philips) 3030	21,600 Lm 20,500 Lm RGB	30° / 60° / 85°x135° 15° / 30° / 60° / 120° / 60°x135°/85°x135° 30° / 60° / 85°x135°	435x390x89 mm 435x390x89 mm 435x390x89 mm	11 Kg 11 Kg 11 Kg
DVL0541-AFL0013-0210-1	210W	108 210 108	Lumileds (Philips) 5050 Lumileds (Philips) 3030 Samsung	29,500 Lm 25,200 Lm 22,500 Lm	15° / 30° / 60° / 120° / 85°x135° 30° / 60° / 85°x135° 15° / 30° / 60° / 120° / 60°x135°/85°x135°	435x390x89 mm 435x390x89 mm 435x390x89 mm	11 Kg 11 Kg 11 Kg
DVL0541-AFL0007-0240-1RGB	240W	180	Lumileds (Philips)	RGB	30° / 60° / 85°x135°	450x390x89 mm	15.5 Kg
DVL0541-AFL0008-0280-1	280W	144 280 144	Lumileds (Philips) 5050 Lumileds (Philips) 3030 Samsung	39,200 Lm 33,600 Lm 31,900 Lm	15° / 30° / 60° / 120° / 85°x135° 30° / 60° / 85°x135° 15° / 30° / 60° / 120° / 60°x135°/85°x135°	605x390x89 mm 605x390x89 mm 605x390x89 mm	15.5 Kg 15.5 Kg 15.5 Kg
DVL0541-AFL0014-0300-1	300W	280	Lumileds (Philips) 3030	36,000 Lm	30° / 60° / 85°x135°	754x390x89 mm	15.5 Kg
DVL0541-AFL0015-0360-1	360W	350 180	Lumileds (Philips) 3030 Samsung	42,300 Lm 39,300 Lm	30° / 60° / 85°x135° 15° / 30° / 60° / 120° / 60°x135°/85°x135°	835x390x89 mm 835x390x89 mm	18.2 Kg 18.2 Kg
DVL0541-AFL0016-0400-1	400W	216 420 216	Lumileds (Philips) 5050 Lumileds (Philips) 3030 Samsung	56,000 Lm 48,500 Lm 40,500 Lm	15° / 30° / 60° / 120° / 85°x135° 30° / 60° / 85°x135° 15° / 30° / 60° / 120° / 60°x135°/85°x135°	530x712x100 mm 530x712x100 mm 530x712x100 mm	21.8 Kg 21.8 Kg 21.8 Kg
DVL0541-AFL0016-0480-1	480W	420 216	Lumileds (Philips) 3030 Samsung	55,200 Lm 51,800 Lm	30° / 60° / 85°x135° 15° / 30° / 60° / 120° / 60°x135°/85°x135°	530x712x100 mm 530x712x100 mm	21.8 Kg 21.8 Kg
DVL0541-AFL0017-0600-1	600W	288 560 288	Lumileds (Philips) 5050 Lumileds (Philips) 3030 Samsung	84,000 Lm 72,000 Lm 66,000 Lm	15° / 30° / 60° / 120° / 85°x135° 30° / 60° / 85°x135° 15° / 30° / 60° / 120° / 60°x135°/85°x135°	685x712x100 mm 685x712x100 mm 685x712x100 mm	28.5 Kg 28.5 Kg 28.5 Kg
DVL0541-AFL0017-0640-1	640W	288 560 288	Lumileds (Philips) 5050 Lumileds (Philips) 3030 Samsung	90,000 Lm 73,600 Lm 67,200 Lm	15° / 30° / 60° / 120° / 85°x135° 30° / 60° / 85°x135° 15° / 30° / 60° / 120° / 60°x135°/85°x135°	685x712x100 mm 685x712x100 mm 685x712x100 mm	28.5 Kg 28.5 Kg 28.5 Kg
DVL0541-AFL0018-0800-1	800W	360 700 360	Lumileds (Philips) 5050 Lumileds (Philips) 3030 Samsung	112,000 Lm 95,800 Lm 86,400 Lm	15° / 30° / 60° / 120° / 85°x135° 30° / 60° / 85°x135° 15° / 30° / 60° / 120° / 60°x135°/85°x135°	840x712x100 mm 840x712x100 mm 840x712x100 mm	36.8 Kg 36.8 Kg 36.8 Kg
DVL0541-AFL0019-0900-1	900W	360 700	Lumileds (Philips) 5050 Lumileds (Philips) 3030	121,000 Lm 108,000 Lm	15° / 30° / 60° / 120° / 85°x135° 30° / 60° / 85°x135°	840x712x100 mm 840x712x100 mm	36.8 Kg 36.8 Kg

Round Sport Series

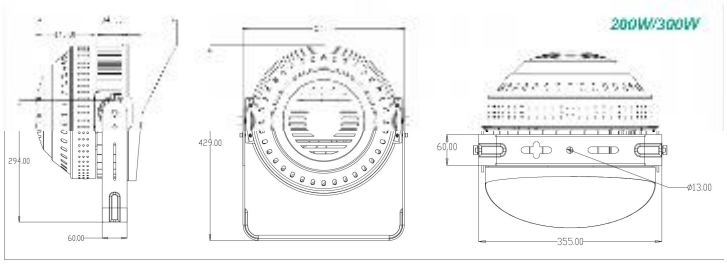

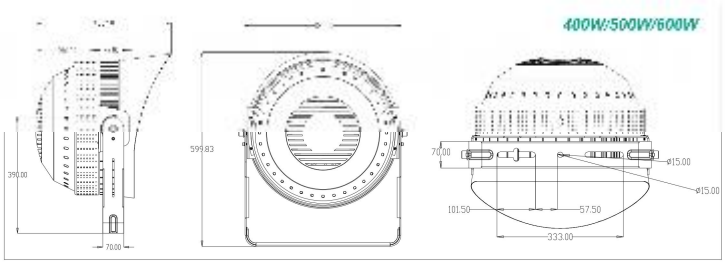

Part number	LED Power	LED Qt'y	Initial Flux Lm@4000K	Beam angle	Dimension (L / W / H) mm	Weight
DVL05.101-UFL0001-0200-1	200W	432 SMD3030	28 000-30 000 Lm	60°/90°	355x342x429	9.0 Kg
DVL05.101-UFL0001-0300-1	300W	432 SMD3030	42 000-45 000 Lm	60°/90°	355x342x429	9.2 Kg
DVL05.101-UFL0002-0400-1	400W	864 SMD3030	56 000-60 000 Lm	30°/60°/90°	481x453x600	17,5 Kg
DVL05.101-UFL0002-0500-1	500W	864 SMD3030	70 000-75 000 Lm	30°/60°/90°	481x453x600	18,9 Kg
DVL05.101-UFL0002-0600-1	600W	864 SMD3030	84 000-90 000 Lm	30°/60°/90°	481x453x600	20,1 Kg

IP66 | IK08 | INPUT AC 90-305V 50/60 Hz MEAN WELL | PF>95 | Luminaire EFFICIENCY 140 Lm/W | LED LUMILEDS | CRI>70 | CRI>80 | 50 000 h | -20°~+50° | PWM | 0-10V | DALI | 3000K CCT 6500K

Sport Series, rectangular



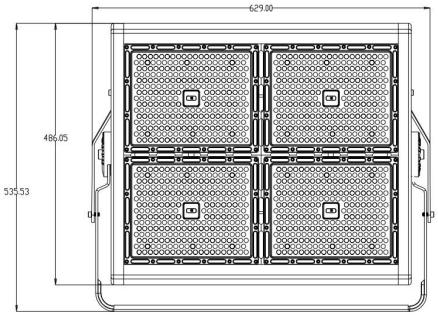

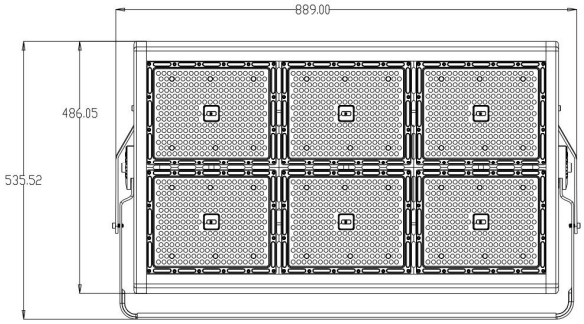

Part number	LED Power	LED Qt'y	Initial Flux Lm@4000K	Beam angle	Dimension (H / W / T) mm	Weight
DVL05.101-UFL0010-0400-1	400W	560 SMD3030	56 000 Lm	25°/45°/60°/90°	472x324x160	15.0 Kg
DVL05.101-UFL0010-0400-1	400W	140 XTE	48 000Lm	10°	472x324x160	15.0 Kg
DVL05.101-UFL0010-0500-1	500W	560 SMD3030	70 000 Lm	25°/45°/60°/90°	472x324x160	15.5 Kg
DVL05.101-UFL0010-0500-1	500W	140 XTE	60 000Lm	10°	472x324x160	15,5 Kg
DVL05.101-UFL0011-0800-1	800W	1120 SMD3030	112 000 Lm	25°/45°/60°/90°	536x629x160	26.0 Kg
DVL05.101-UFL0011-0800-1	800W	280 XTE	96 000Lm	10°	536x629x160	26,0 Kg
DVL05.101-UFL0011-1000-1	1000W	1120 SMD3030	140 000 Lm	25°/45°/60°/90°	536x629x160	26.5 Kg
DVL05.101-UFL0011-1000-1	1000W	280 XTE	120 000Lm	10°	536x629x160	26,5 Kg
DVL05.101-UFL0012-1200-1	1200W	1680 SMD3030	140 000 Lm	25°/45°/60°/90°	536x890x160	37.0 Kg
DVL05.101-UFL0012-1200-1	1200W	420 XTE	120 000Lm	10°	536x890x160	37,0 Kg
DVL05.101-UFL0012-1500-1	1500W	1680 SMD3030	210 000 Lm	25°/45°/60°/90°	536x890x160	37.5 Kg
DVL05.101-UFL0012-1500-1	1500W	420 XTE	180 000Lm	10°	536x890x160	37,5 Kg



Divolight
LIGHTING SOLUTIONS

LED Flood Light

Sport Series rectangular

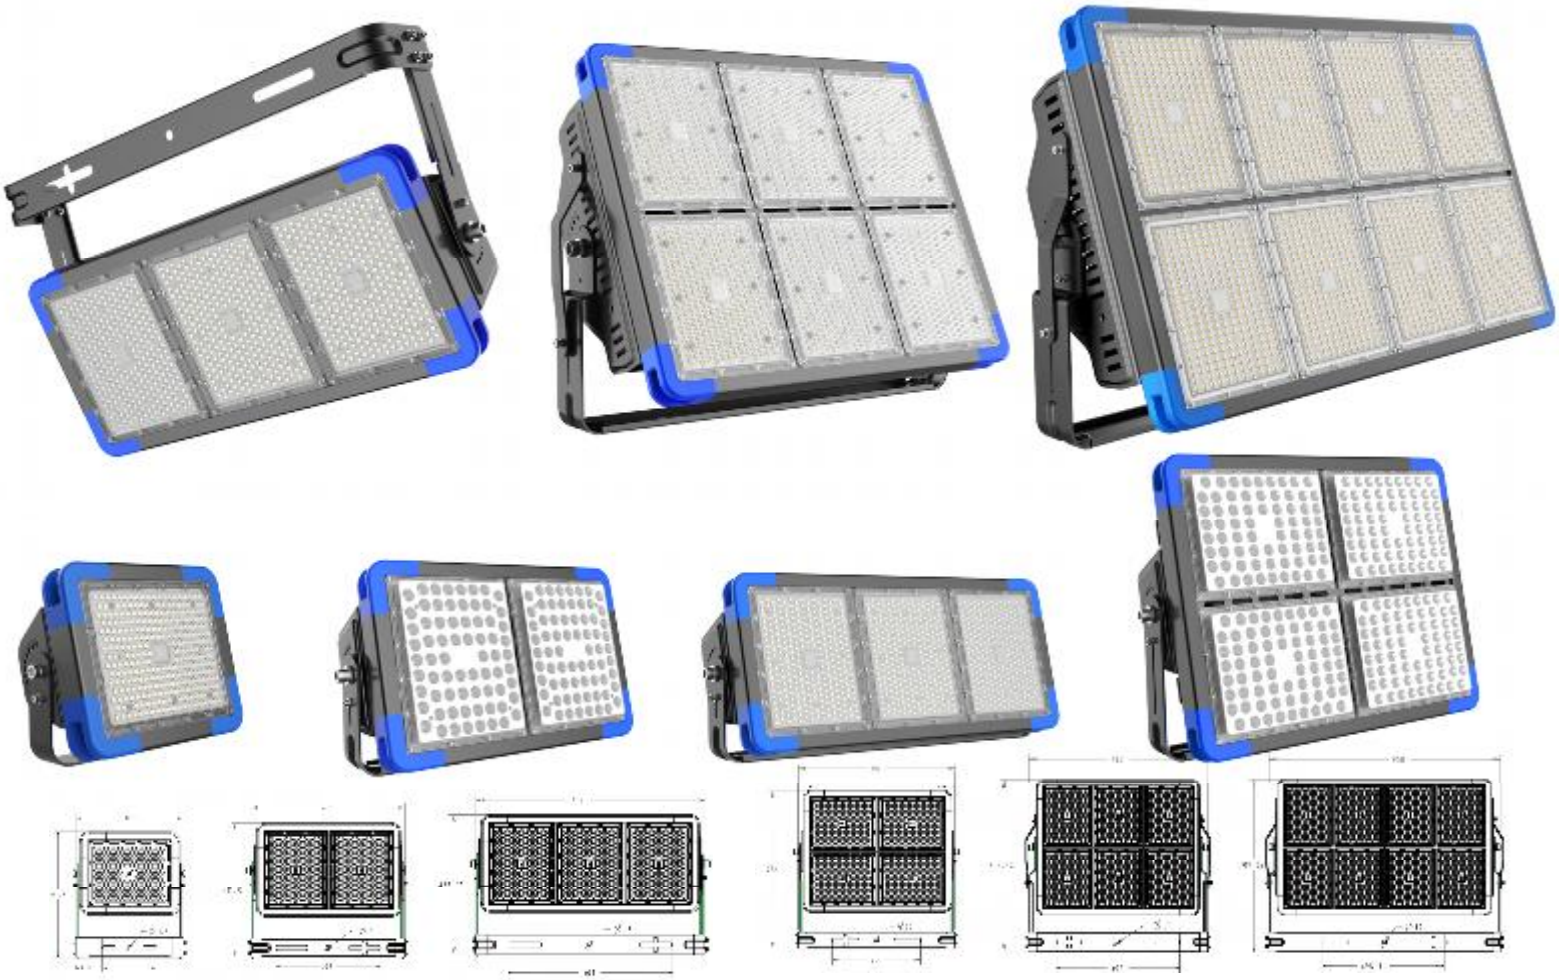

Part number	LED Power	LED Qt'y	Initial Flux Lm@4000K	Beam angle	Dimension (H / W / T) mm	Weight
DVL05.101-UFL0020-0200-1	200W	280 SMD3030	27 000 Lm	25°/45°/60°/90°	250x300x120	6.5 Kg
DVL05.101-UFL0020-0200-1	200W	70 XTE	24 000Lm	10°	250x300x120	6.5 Kg
DVL05.101-UFL0021-0360-1	360W	560 SMD3030	50 400 Lm	25°/45°/60°/90°	300x460x150	13.0 Kg
DVL05.101-UFL0021-0360-1	360W	140 XTE	43 200Lm	10°	300x460x150	13.0 Kg
DVL05.101-UFL0022-0540-1	540W	840 SMD3030	75 600 Lm	25°/45°/60°/90°	300x670x150	19.0 Kg
DVL05.101-UFL0022-0540-1	540W	210 XTE	64 800Lm	10°	300x670x150	19.0 Kg
DVL05.101-UFL0023-0720-1	720W	1120 SMD3030	100 800 Lm	25°/45°/60°/90°	460x560x150	26.0 Kg
DVL05.101-UFL0023-0720-1	720W	280 XTE	86 400Lm	10°	460x560x150	26.0 Kg
DVL05.101-UFL0024-1080-1	1080W	1680 SMD3030	151 200 Lm	25°/45°/60°/90°	560x670x200	37.0 Kg
DVL05.101-UFL0024-1080-1	1080W	420 XTE	129 600Lm	10°	560x670x200	37,0 Kg
DVL05.101-UFL0025-1440-1	1440W	2240 SMD3030	201 600 Lm	25°/45°/60°/90°	560x880x200	47.0 Kg
DVL05.101-UFL0025-1440-1	1440W	560 XTE	172 800Lm	10°	560x880x200	47.0 Kg

IP66 IK08 INPUT AC 90-305V 50/60 Hz MW MEAN WELL PF>95 Luminaire EFFICIENCY 140 Lm/W LED LUMILEDS LED CREE CRI>80 50 000 h -20°~+50° PWM 0-10V DALI 3000K CCT 6500K

Sport Series dynamic

Part number	LED Power	LED Qt'y	Initial Flux Lm@4000K	Beam angle	Dimension (H / W / T) mm	Weight
DVL05.101-UFL0030-0250-1	250W	336 SMD3030 Lumiled	33 600 Lm	25°/45°/60°/90°	222x462x111	8.0 Kg
DVL05.101-UFL0030-0250-1	250W	126 –SMD3737 OSRAM	33 600Lm	10°	222x462x111	8.0 Kg
DVL05.101-UFL0031-0500-1	500W	672 SMD3030 Lumiled	67 500 Lm	25°/45°/60°/90°	399x462x111	15.0 Kg
DVL05.101-UFL0031-0500-1	500W	252–SMD3737 OSRAM	67 500Lm	10°	399x462x111	15.0 Kg
DVL05.101-UFL0032-0750-1	750W	1008 SMD3030 Lumiled	101 250 Lm	25°/45°/60°/90°	584x462x111	20.0 Kg
DVL05.101-UFL0032-0750-1	750W	378 –SMD3737 OSRAM	101 250Lm	10°	584x462x111	20.0 Kg
DVL05.101-UFL0033-1000-1	1000W	1344 SMD3030 Lumiled	135 000 Lm	25°/45°/60°/90°	761x462x111	26.0 Kg
DVL05.101-UFL0033-1000-1	1000W	504 –SMD3737 OSRAM	135 000Lm	10°	761x462x111	26.0 Kg

INDUSTRIAL Series

80W / 100W

120W / 150W

Part number	LED Power	LED Qt'y	Initial Flux Lm@4000K	Dimension (L / H / W) mm	Weight
DVL0562-UFL0001-0080-1	80W	96	11 200 Lm	320x270x205	2,2 Kg
DVL0562-UFL0002-0100-1	100W	120	14 000 Lm	320x270x205	2,2 Kg
DVL0562-UFL0003-0120-1	120W	144	16 800 Lm	350x300x205	2,6 Kg
DVL0562-UFL0004-0150-1	150W	176	21 000 Lm	350x300x205	2,6 Kg
DVL0562-UFL0005-0200-1	200W	240	27 000 Lm	350x300x205	2,6 Kg

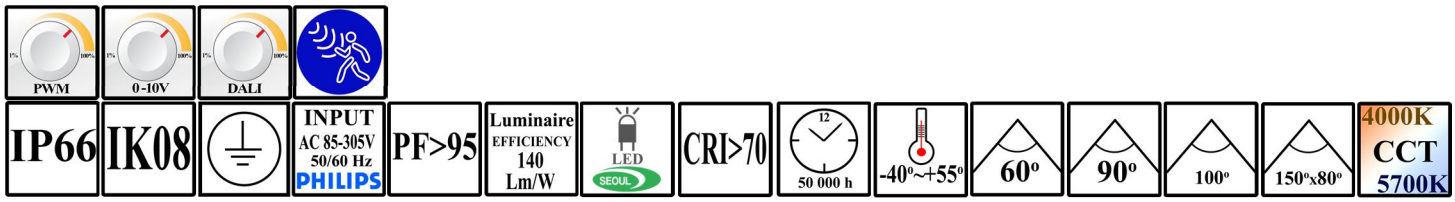

Tunnel Light Series

PHILIPS INSIDE

- Optical Lens Light Distribution
- Modular Light Bar System

Part number	LED Power	LED Qt'y	Light Bars	Initial Flux	Dimension (L / H / W)	Weight
DVL0541-UTF0001-0060-1	60W	28	2	6300 - 6700 Lm	293x312x163 mm	4.8 Kg
DVL0541-UTF0002-0090-1	90W	42	3	9600 - 10,100 Lm	368x312x163 mm	5.7 Kg
DVL0541-UTF0003-0120-1	120W	56	4	12,900 - 13,500 Lm	443x312x163 mm	7.1 Kg
DVL0541-UTF0004-0150-1	150W	70	5	14,800 - 15,600 Lm	518x312x163 mm	7.8 Kg
DVL0541-UTF0005-0180-1	180W	84	6	18,400 - 19,320 Lm	593x312x163 mm	8.9 Kg
DVL0541-UTF0006-0210-1	210W	98	7	21,600 - 22,700 Lm	668x312x163 mm	10 Kg
DVL0541-UTF0007-0240-1	240W	112	8	25,800 - 27,200 Lm	743x312x163 mm	10.9 Kg

LED High-Bay Light

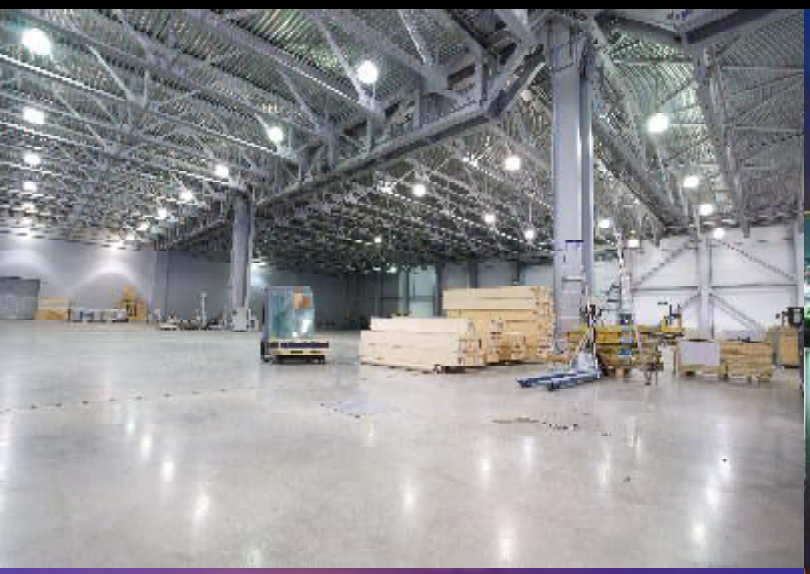

LED High-Bay Light

Poseidon Series



Part No.	LED Power	Luminous flux	Efficiency	Dimension (D / H)	Weight	Ingrate Reflector Beam Angle
DVL0543-UHB0030-0080-1	80W	10 500 Lm	130 Lm/W	320x160 mm	6.2 Kg	120°
DVL0543-UHB0031-0100-1	100W	13 000Lm	130 Lm/W	400x172 mm	6.2 Kg	120°
DVL0543-UHB0032-0120-1	120W	15 600 Lm	130 Lm/W	400x172 mm	6.7 Kg	60° / 120°
DVL0543-UHB0033-0150-1	150W	19 600 Lm	130 Lm/W	400x172 mm	6.7 Kg	60° / 120°
DVL0543-UHB0034-0200-1	200W	26 000 Lm	130 Lm/W	400x172 mm	6.7 Kg	60° / 120°

LED High-Bay Light

Poseidon II Series



Part No.	LED Power	Luminous flux	Efficiency	Dimension (D / H)	Weight	Optic Lens Beam Angle
DVL0543-UUF0036-0100-1	100W	13,000 Lm	130 Lm/W	382x172 mm	6.7 Kg	120°
DVL0543-UUF0037-0120-1	120W	15,600 Lm	130 Lm/W	382x172 mm	6.7 Kg	120°
DVL0543-UUF0038-0150-1	150W	19,600 Lm	130 Lm/W	382x172 mm	7.2 Kg	60° / 120°
DVL0543-UUF0039-0200-1	200W	26,000 Lm	130 Lm/W	382x172 mm	7.2 Kg	60° / 120°
DVL0543-UUF0040-0240-1	240W	31,200 Lm	130 Lm/W	382x172 mm	7.2 Kg	120°

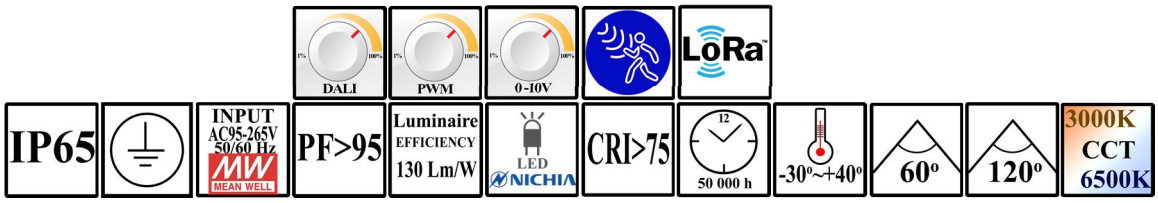

Pizza Series

Part number	LED Power	Luminous flux	Efficiency	Dimension (D / H)	Weight
DVL0549-UHB0030-0100-1	100W	15,000 Lm	150 Lm/W	380x240 mm	6.7 Kg
DVL0549-UHB0031-0120-1	120W	18,000 Lm	150 Lm/W	380x240 mm	6.7 Kg
DVL0549-UHB0032-0150-1	150W	22,500 Lm	150 Lm/W	380x240 mm	7.2 Kg
DVL0549-UHB0033-0180-1	180W	27,000 Lm	150 Lm/W	380x240 mm	7.2 Kg
DVL0549-UHB0034-0200-1	200W	30,000 Lm	150 Lm/W	380x240 mm	7.2 Kg
DVL0549-UHB0035-0240-1	240W	33,600 Lm	140 Lm/W	380x240 mm	7.2 Kg

Divolight
LIGHTING SOLUTIONS

LED High-Bay Light

Mini style

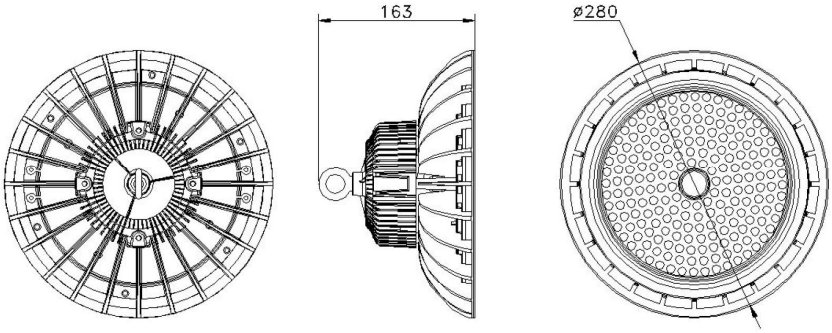

Part No.	Power consumption	Luminous flux	Size mm	Weight
DVL0549-UHB0036-0060-1	60±5%W	8 100 Lm	⦰280×H163	1.9 Kg
DVL0549-UHB0037-0080-1	80±5%W	10 600 Lm	⦰280×H163	2.6 Kg
DVL0549-UHB0038-0100-1	100±5%W	13 500 Lm	⦰280×H163	2.6 Kg
DVL0549-UHB0039-0120-1	120±5%W	15 600 Lm	⦰280×H163	2.4 Kg

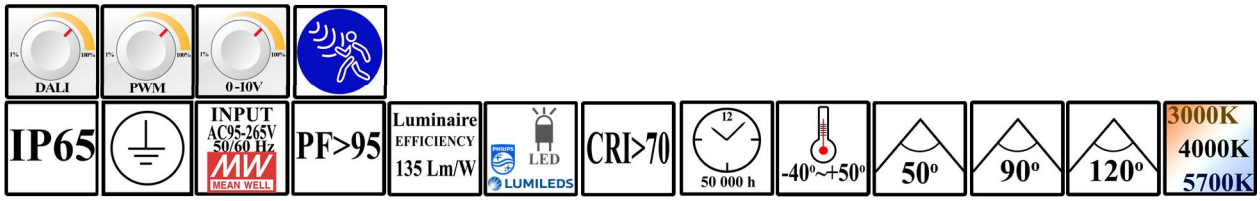

LED High-Bay Light

Triton Series

Part number	LED Power	Initial Flux	Efficiency	Dimension (D / H) W/O Reflector	Weight
DVL0565-UHB0004-0060-1	60W	7,500 Lm	125 Lm/W	355x261 mm	2.2 Kg
DVL0565-UHB0001-0100-1	100W	12,500 Lm	125 Lm/W	355x327 mm	2.8 Kg
DVL0565-UHB0001-0100-1EX	100W	14,000 Lm	140 Lm/W	355x327 mm	2.8 Kg
DVL0565-UHB0002-0150-1	150W	18,750 Lm	125 Lm/W	355x327 mm	4.5 Kg
DVL0565-UHB0002-0150-1EX	150W	21,000 Lm	140 Lm/W	355x327 mm	4.5 Kg
DVL0565-UHB0003-0200-1	200W	25,000 Lm	125 Lm/W	355x357 mm	5.7 Kg
DVL0565-UHB0003-0200-1EX	200W	28,000 Lm	140 Lm/W	355x357 mm	5.7 Kg

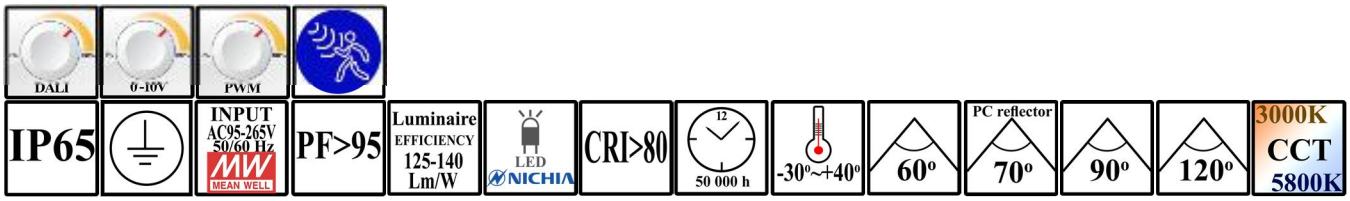

LED High-Bay Light

Triton II Series (Lenses &/or reflectors)

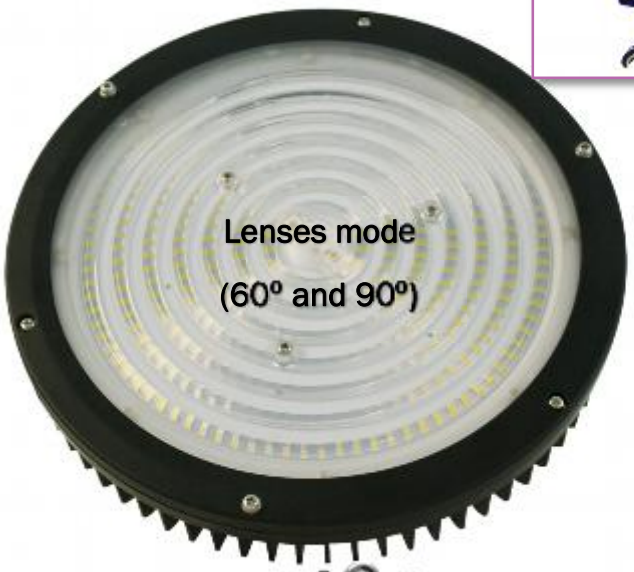

Part number	LED Power	Initial Flux	LED QTY 757G-V1	Dimension (D / H) W/O Reflector	Weight
DVL0565-UHB0005-0100-1	100W	15,000 Lm	266	280x168 mm	4.0 Kg
DVL0565-UHB0006-0150-1	150W	22,500 Lm	364	280x168 mm	4.5 Kg
DVL0565-UHB0007-0200-1	200W	30,000 Lm	483	280x188 mm	5.0 Kg
DVL0565-UHB0008-0240-1	240W	36,000 Lm	581	280x193 mm	5.7 Kg

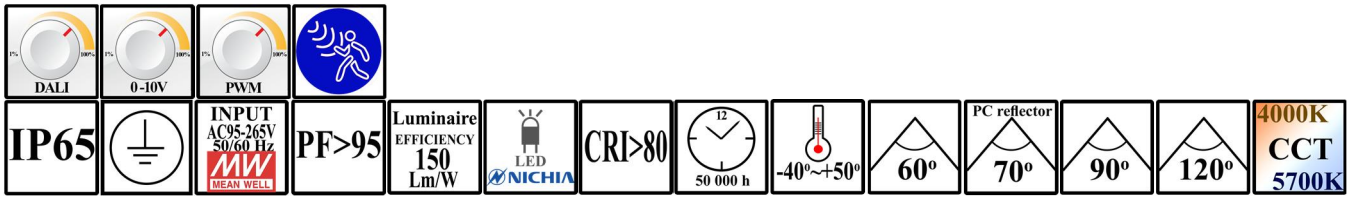

LED High-Bay Light

Diamond Series (Up-Down)

Part number	LED Power	Initial Flux	LED QTY Luxion 3030 2D	Up-shine	Angle beam	Dimension (D / H)	Weight
DVL0589-UHB0001-0100-1	100W	14,000 Lm	156	0%	110°	350x273 mm	6.0 Kg
DVL0589-UHB0002-0100-1	100W	14,000 Lm	180	10%	110°	350x273 mm	6.0 Kg
DVL0589-UHB0003-0100-1	100W	14,000 Lm	210	20%	110°	350x273 mm	6.0 Kg
DVL0589-UHB0004-0150-1	150W	21,000 Lm	216	0%	70°/85°/110°	350x273 mm	6.0 Kg
DVL0589-UHB0005-0150-1	150W	21,000 Lm	240	10%	70°/85°/110°	350x273 mm	6.0 Kg
DVL0589-UHB0006-0150-1	150W	21,000 Lm	270	20%	70°/85°/110°	350x273 mm	6.0 Kg

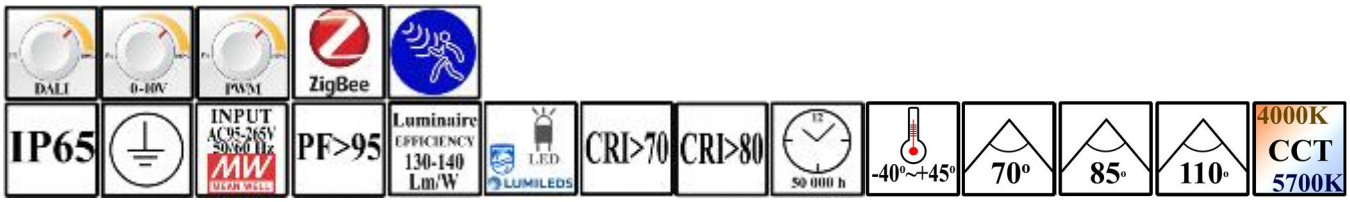

Linear High-Bay Series

Part number	LED Power	Initial Flux	LED Qt'y	Dimension (L/W/H)	Weight	Optic Lens Beam Angle
DVL0549-ULL0001-0080-1	80 W	10,400 Lm	112	535x105x85 mm	2.7 Kg	60° / 90° / 60° x130°
DVL0549-ULL0002-0120-1	120 W	15,600 Lm	168	798x105x85 mm	4 Kg	60° / 90° / 60° x130°
DVL0549-ULL003-0160-1	160 W	20,800 Lm	224	1050x105x85 mm	5.4 Kg	60° / 90° / 60° x130°
DVL0549-ULL0004-0240-1	240 W	31,200 Lm	336	802x232x85 mm	8.5 Kg	60° / 90° / 60° x130°
DVL0549-ULL0005-0320-1	320 W	41,600 Lm	448	1058x232x85 mm	11.5 Kg	60° / 90° / 60°x130°

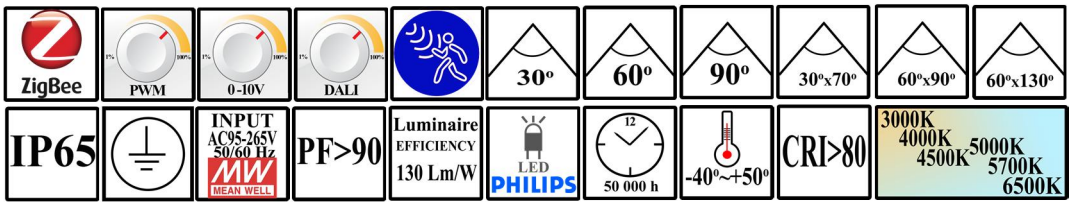

LED Suspended / Surface Mounted Luminaires

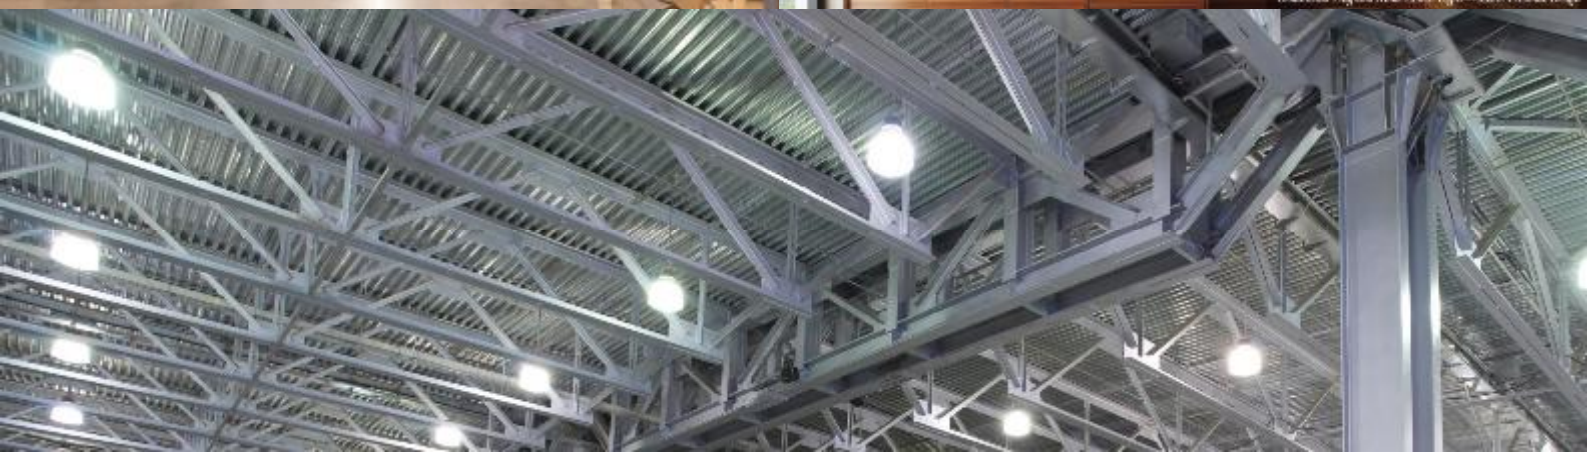

Aluminum LED Tri-Proof Series

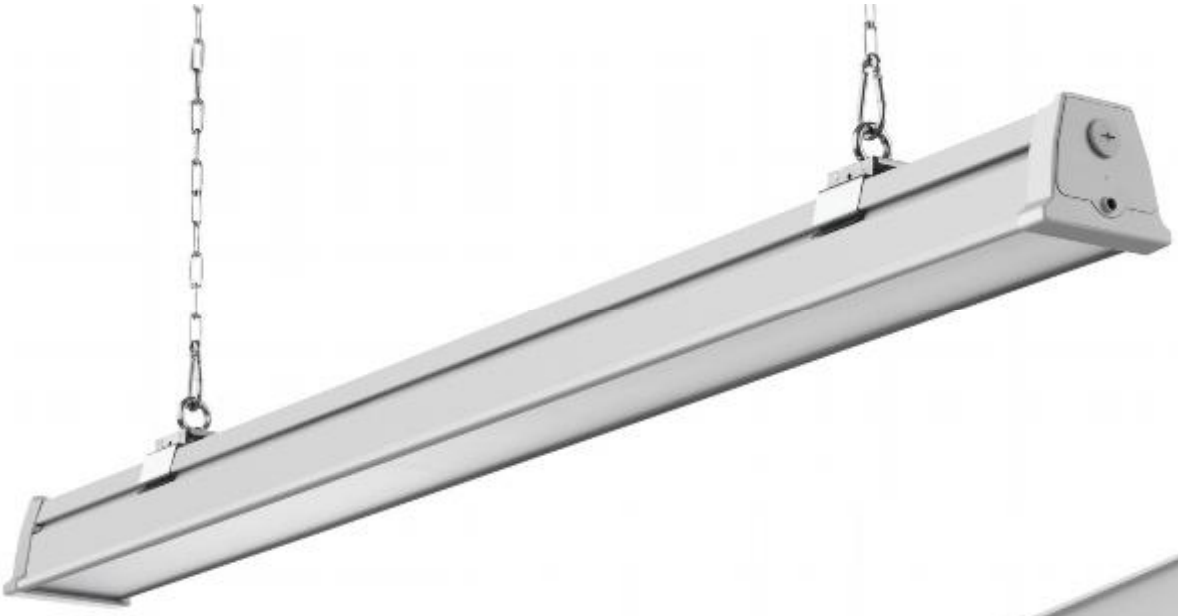

Part number	LED Power	Initial Flux	LED Qt'y	Dimension (L/W/H)	Weight
DVL0561-UTP0005-0030-1	30W	3600 Lm	84	640x112x89 mm	2.7 Kg
DVL0561-UTP0004-0040-1	40W	4800 Lm	108	1240x112x89 mm	3.5 Kg
DVL0561-UTP0004-0060-1	60W	6900 Lm	156	1240x112x89 mm	3.5 Kg
DVL0561-UTP0006-0060-1	60W	6900 Lm	156	1540x112x89 mm	4.2 Kg

IP65 | INPUT AC220-240V 50/60 Hz PHILIPS | INPUT AC220-240V 50/60 Hz TRIDONIC | Luminaire EFFICIENCY 130-150 Lm/W | PF>95 | -20°~+45° | IK08 | LED EPISTAR | 50 000 h | CRI>80 | DALI | 0-10V | EMERGENCY | 3000K CCT 6000K

Mini Industrial LED Tri-Proof Series

A	B	C	D	E	F
545	600	613	67	63	58
1145	1200	1213	67	63	58
1445	1500	1513	67	63	58

Part number	LED Power	Initial Flux	Dimension (L/W/H)	Weight
DVL0561-UTP0009-0018-1	18W	2160 Lm	613x63x58 mm	1.03 Kg
DVL0561-UTP0007-0036-1	36W	4320 Lm	1213x63x58 mm	1.65 Kg
DVL0561-UTP0007-0048-1	48W	5760 Lm	1213x63x58 mm	2.03 Kg
DVL0561-UTP0008-0048-1	48W	5760 Lm	1513x63x58 mm	2.03 Kg

IP65 | INPUT AC220-240V 50 Hz | PF>95 | -20°~+40° | Luminaire EFFICIENCY 120-130 Lm/W | IK05 | LED EPISTAR | 35 000 h | CRI>80 | DALI | EMERGENCY | 3000K CCT 6000K

Industrial LED Tri-Proof Series

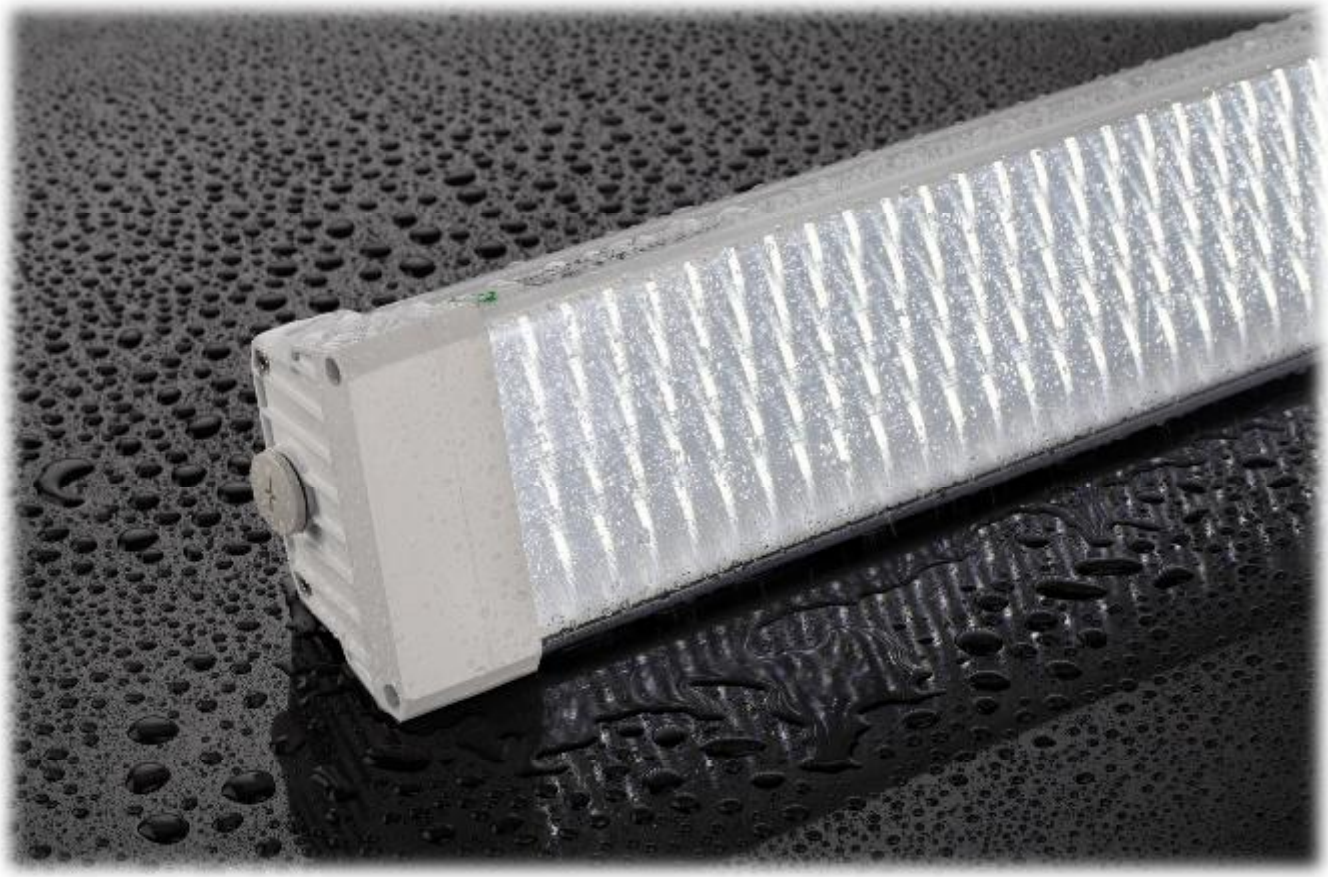

Part number	LED Power	Initial Flux	LED Qt'y	Dimension (L/W/H)	Weight
DVL0561-UTP0001-0020-1	20W	2200 Lm	180	600x109x86 mm	1.8 Kg
DVL0561-UTP0002-0045-1	40W	4900 Lm	360	1200x109x86 mm	3.0 Kg
DVL0561-UTP0003-0060-1	60W	6600 Lm	450	1500x109x86 mm	4.2 Kg



Designo LED Linear Fixtures

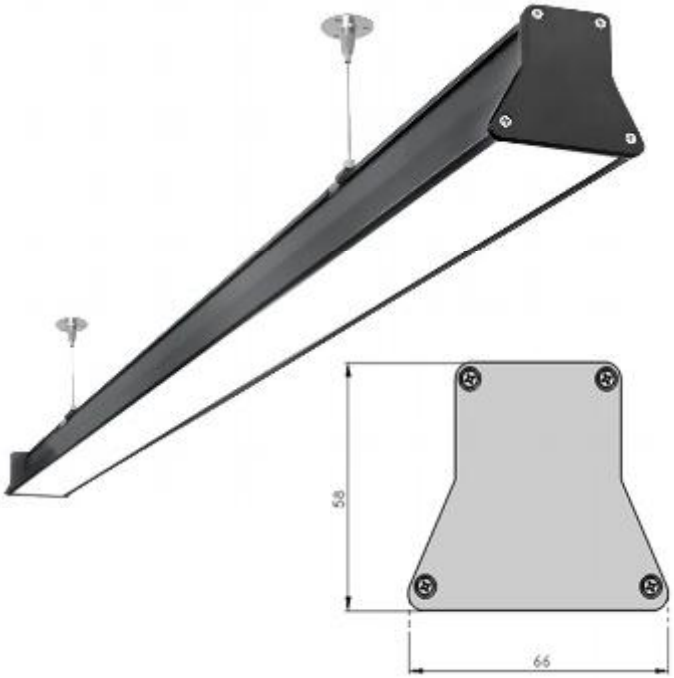

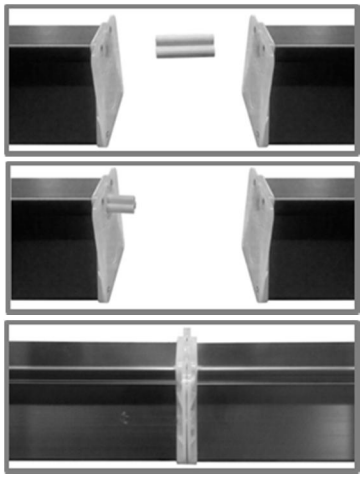

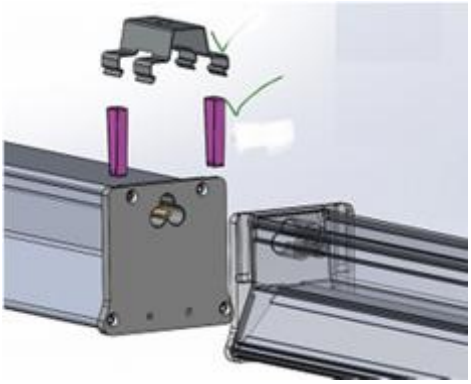

Part number	LED Power	Initial Flux	Dimension (L/W/H)	Weight	Beam Angle
DVL0579-UTP0010-0012/24-1	12/24W	1400-2800 Lm	600x66x58 mm	0.75 Kg	120°
DVL0579-UTP0011-0018/36-1	18/36W	2150/4300 Lm	1200x66x58 mm	1.4 Kg	120°
DVL0579-UTP0012-0024/48-1	24/48W	2880/5760 Lm	1500x66x58 mm	1.68 Kg	120°



Seamless LED Linear Fixtures

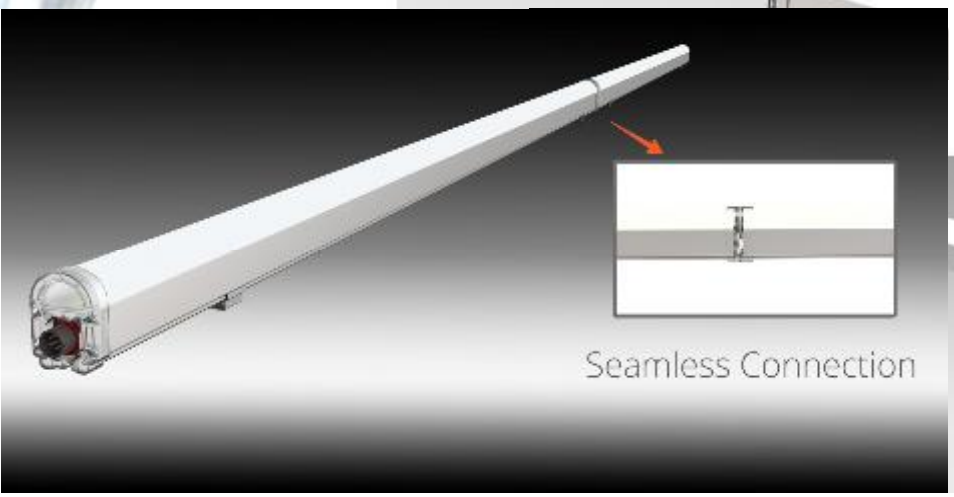

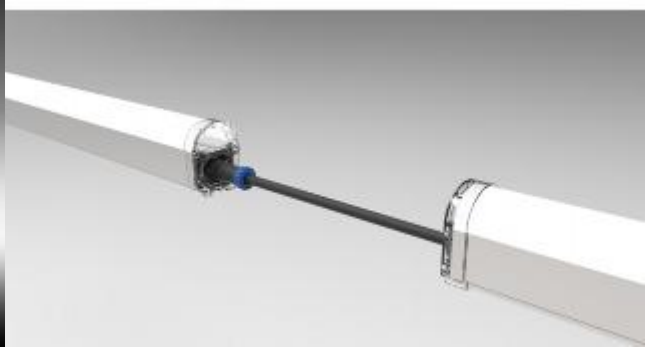

Part number	LED Power	Initial Flux	Dimension (L/W/H)	Weight
DVL0596-UTP0001-0008-1	8 W	1120 Lm	300x46x63 mm	0.70 Kg
DVL0596-UTP0002-0015-1	15W	2100 Lm	600x46x63 mm	1.30 Kg
DVL0596-UTP0003-0024-1	24W	3360 Lm	900x46x63 mm	2.10 Kg
DVL0596-UTP0004-0030-1	30W	4200 Lm	1200x46x63 mm	2.70 Kg
DVL0596-UTP0005-0040/50-1	40/50W	5600-7000 Lm	1500x46x63 mm	3.30 Kg



Waterproof tubes / LED Linear Fixtures

Accessory

Part number	LED Power	Initial Flux	Dimension (L/W/H)	Weight
DVL0597-UTP0001-0018-1	18 W	2250 Lm	600x32x43 mm	0.40Kg
DVL0597-UTP0002-0024-1	24 W	3000 Lm	900x32x43 mm	0.90 Kg
DVL0597-UTP0003-0030-1	30W	3750 Lm	1200x32x43 mm	0.70 Kg
DVL0597-UTP0004-0040-1	40W	5000 Lm	1500x32x43 mm	0.86 Kg
DVL0597-UTP0004-0010-1	10W	1400 Lm	1500x32x43 mm	0.86 Kg

IP65 | INPUT AC 100-240V 50/60 Hz | PF>90 | -30°~+45° | LED SAMSUNG | Luminaire EFFICIENCY 125-140 Lm/W | 140° | 50 000 h | CRI>80 | CRI>90 | 2700K CCT 6500K

Trunking / LED Linear Fixtures

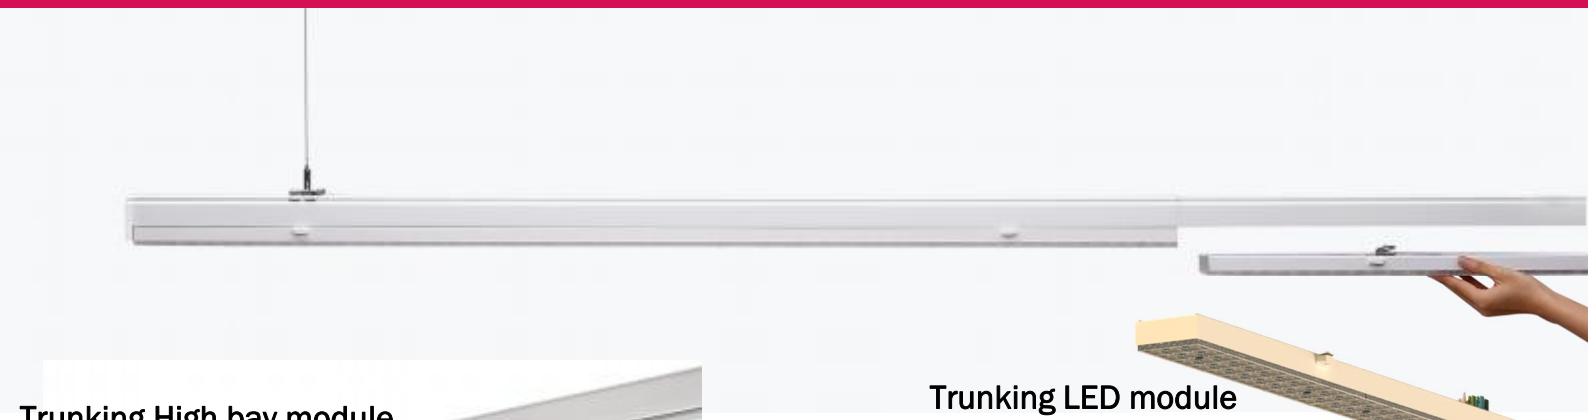

Trunking High bay module

Trunking LED module

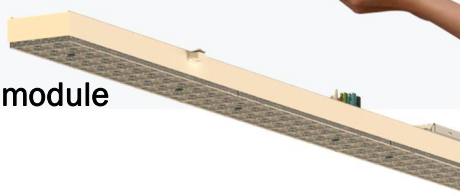

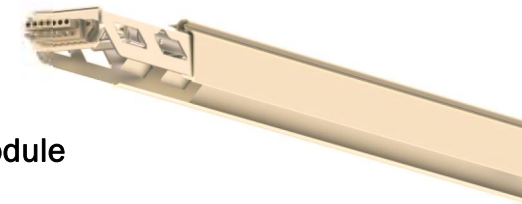

Trunking base module

Trunking track lamp module

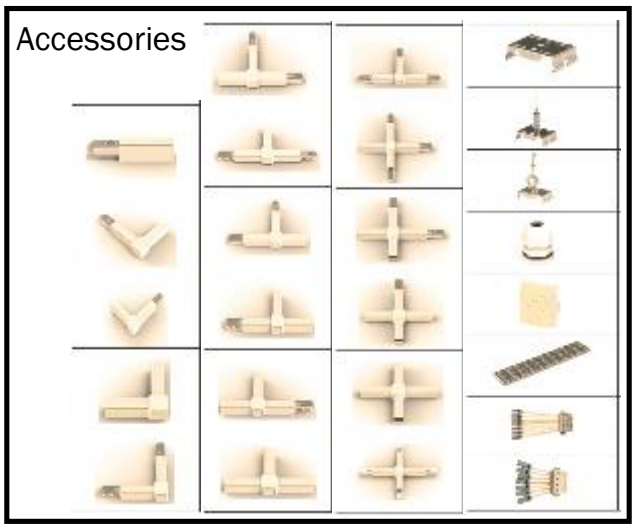

Part number	LED Power	Initial Flux	Dimension (L/W/H)	Weight
DVL0599-UTS0001-0072-1	50-72 W	7000-9700 Lm@5000K	1437x64.5x70mm	3.92Kg

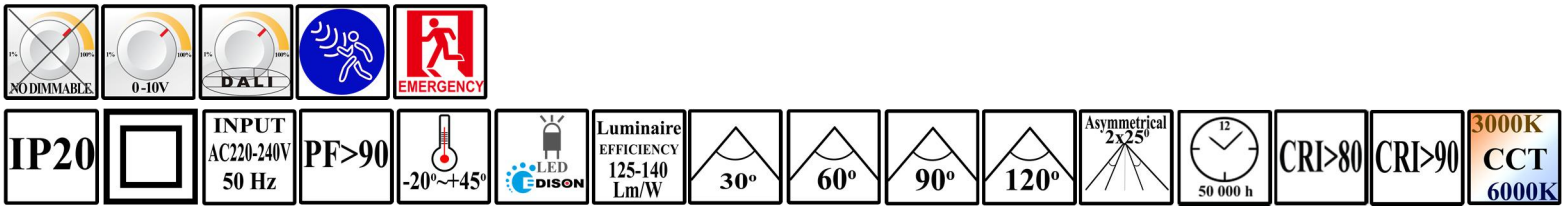

LED Ceiling Light

Part number	LED Power	Initial Flux	LED	Dimension (D/H)
DVL0552-UCE0001-0012-1	12W	1120 Lm	SMD 2835	200x48 mm
DVL0552-UCE0002-0012-1	12W	1120 Lm	SMD 2835	250x48 mm
DVL0552-UCE0003-0018-1	18W	1602 Lm	SMD 2835	300x40 mm
DVL0552-UCE0003-0025-1	25W	2200 Lm	SMD 2835	300x40 mm
DVL0552-UCE0004-0025-1	25W	2200 Lm	SMD 2835	350x40 mm
DVL0552-UCE0005-0030-1	30W	2460 Lm	SMD 2835	400x52 mm



Part number	LED Power	Initial Flux	LED	Dimension (L/W/H)
DVL0552-UCE0006-0012-1	12W	1120 Lm	SMD 2835	200x200x50 mm
DVL0552-UCE0007-0018-1	18W	1602 Lm	SMD 2835	300x300x40 mm
DVL0552-UCE0007-0025-1	25W	2200 Lm	SMD 2835	300x300x40 mm
DVL0552-UCE0008-0025-1	25W	2200 Lm	SMD 2835	350x350x40 mm



LED Ceiling Spot Light

Part number	LED Power	Initial Flux	LED	Dimension (D/H)	Beam Angle	IP Grade
DVL0552-USP0010-0010-1	10W	800 Lm	Citizen COB	90x100 mm	60°	IP54
DVL0552-USP0010-0015-1	15W	1300 Lm	Citizen COB	90x180 mm	60°	IP54
DVL0552-USP0010-0025-1	25W	2420 Lm	Citizen COB	120x110 mm	60°	IP54
DVL0552-USP0010-0035-1	35W	3360 Lm	Citizen COB	160x120 mm	60°	IP54

- Extruded aluminum and die-cast aluminum housing with high corrosion resistance.
- DuPont outdoor electrostatic powder painting. 304 standard stainless steel fastness part and die-cast aluminum frame.
- 4mm thickness tempered glass.
- High purity aluminum heat conduction piece.
- Fire-resistant silicon seal gasket.
- Anodized aluminum reflector

Part number	LED Power	Initial Flux	LED	Dimension (D/H)	Beam Angle	IP Grade
DVL0529-USP0001-0008-1	8W	700 Lm	Cree COB	90x100 mm	24° / 36°	IP65
DVL0529-USP0001-0013-1	13W	1100 Lm	Cree COB	90x180 mm	24° / 36°	IP65

LED Ceiling Spot Light

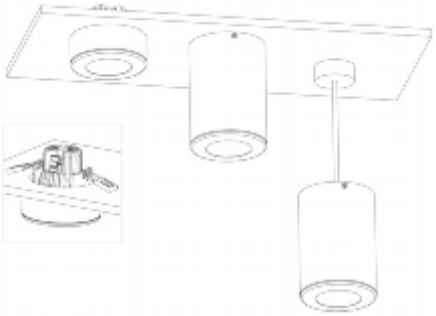

Part number	LED Power	Initial Flux	LED	Dimension (D/H)	Beam Angle
DVL0548-USP0120-0012-1	12W	1060-1300Lm	Epistar COB	96x145mm	20°/38°/55°
DVL0548-USP0120-0012-1	12W	1060-1300Lm	Cree COB	96x145mm	15°/38°
DVL0548-USP0120-0012-1	12W	1060-1300Lm	Citizen COB	96x145mm	15°/38°
DVL0548-USP0121-0020-1	20W	1760-1980Lm	Epistar COB	120x160mm	16°/38°/55°
DVL0548-USP0121-0020-1	20W	1760-1980Lm	Cree COB	120x160mm	12°/38°
DVL0548-USP0121-0020-1	20W	1760-1980Lm	Citizen COB	120x160mm	12°/38°
DVL0548-USP0122-0030-1	30W	3000-3600Lm	Epistar COB	150x185mm	20°/38°/60°
DVL0548-USP0122-0030-1	30W	3000-3600Lm	Cree COB	150x185mm	15°/38°
DVL0548-USP0122-030-1	30W	3000-3600Lm	Citizen COB	150x185mm	15°/38°
DVL0548-USP0123-0040-1	40W	3800-4600Lm	Epistar COB	180x210mm	15°/38°/60°



LED Track Lamp

DVL0547-UTL0008-0030/40-1

DVL0547-UTL0009-0020-1

Part number	LED Power	Initial Flux	LED	Color	AC Track	Beam Angle
DVL0547-UTL0009-0020-1	20W	1600 Lm	COB	Black / White	1-Phase / 3-Phase	20°~60°
DVL0547-UTL0008-0030-1	30W	2600 Lm	COB	Black / White	1-Phase / 3-Phase	20°~60°

IP20 | INPUT AC220-240V 50 Hz | CRI>80 | CRI>90 | COB EPISTAR | COB CITIZEN | 3000K CCT 6500K

LED Track Lamp

DVL0547-UTL0010-0030-1

DVL0547-UTL0011-0030-1

DVL0547-UTL0013-0030-1

DVL0547-UTL0012-0030-1

Part number	LED Power	Initial Flux	LED	Colour	AC Track	Beam Angle
DVL0547-UTL0010-0030-1	30W	2400 Lm	COB	Black / White	1-Phase / 3-Phase	15° / 24°
DVL0547-UTL0011-0030-1	30W	2400 Lm	COB	Black / White	1-Phase / 3-Phase	15° / 24°
DVL0547-UTL0012-0030-1	30W	2400 Lm	COB	Black / White	1-Phase / 3-Phase	15° / 24°
DVL0547-UTL0013-0030-1	30W	2400 Lm	COB	Black / White	1-Phase / 3-Phase	15° / 24°

IP20 | INPUT AC220-240V 50 Hz | COB CITIZEN | CRI>80 | CRI>90 | 3000K CCT 6500K

LED Up & Down Panels



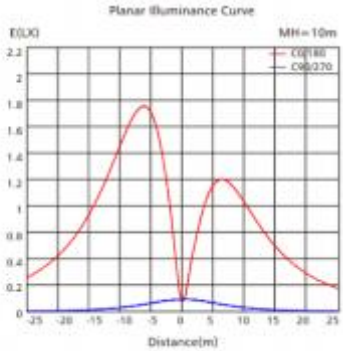

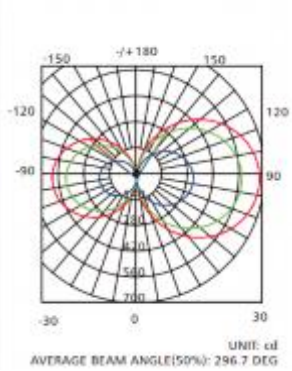

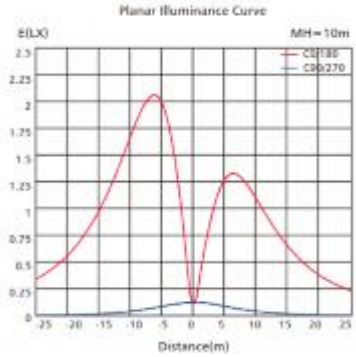

Installation

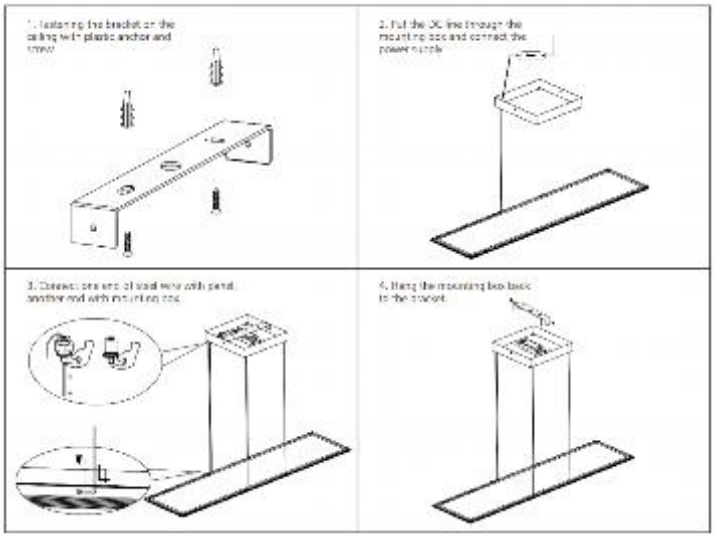

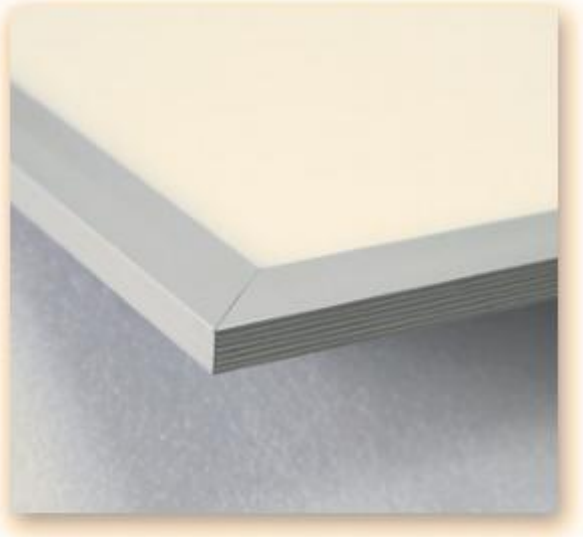

Part number	LED Power	Initial Flux	Dimension	Weight	Light Distribution	Beam Angle
DVL0552-UPL00010-0045-1	45W	3100 Lm	595x595x11 mm	3.8 Kg	70% Down - 30% UP	15° / 24°
DVL0552-UPL00011-0045-1	45W	3100 Lm	1195x295x11 mm	4.2 Kg	70% Down - 30% UP	15° / 24°



LED Recessed Luminaires

Aluminium LED Panels

Part number	LED Power	Initial Flux	Light Efficiency	CCT	Dimension	Weight	Colour
DVL0581-UPL0001-0040-1	40W	3600 Lm	90 Lm/W	2800-6500K	600x600x9 mm	3.5 Kg	Silver / White
DVL0534-UPL0010-0030-1	30W	3600 Lm	120 Lm/W	2800-6500K	600x600x9 mm	3.5 Kg	Silver / White
DVL0562-UPL0001-0030-1	30W	3900 Lm	130 Lm/W	2800-6500K	600x600x9 mm	3.5 Kg	Silver / White
DVL0562-UPL0002-0040-1	40W	4800 Lm	120 Lm/W	2800-6500K	600x600x11 mm	3.8 Kg	Silver / White
DVL0576-UPL0001-0040-1	40W	5200 Lm	130 Lm/W	2800-6500K	600x600x9 mm	3.5 Kg	Silver / White
DVL0562-UPL0005-0040-1-IP	40W	4000 Lm	100Lm/W	2800-6500K	595x595x15 mm	4.5 Kg	Silver / White
DVL0534-UPL0003-0036-1-CCT	36W	3600 Lm	100 Lm/W	Controllable	600x600x11 mm	3.8 Kg	Silver / White
DVL0534-UPL0003-0025-CCT	24W	2400 Lm	100 Lm/W	Controllable	600x600x11 mm	3.8 Kg	Silver / White
DVL0580-UPL0002-0040-1-120Lm/W	36W	4320 Lm	120 Lm/W	2800-6500K	1200x300x10 mm	4.2 Kg	Silver / White
DVL0580-UPL0002-0040-1-130Lm/W	36W	4600 Lm	130 Lm/W	2800-6500K	1200x300x10 mm	4.2 Kg	Silver / White
DVL0580-UPL0003-0055-1-100Lm/W	55W	5500 Lm	100 Lm/W	2800-6500K	1200x600x10 mm	6.8 Kg	Silver / White
DVL0580-UPL0003-0055-1-115Lm/W	55W	6300 Lm	115 Lm/W	2800-6500K	1200x600x10 mm	6.8 Kg	Silver / White
DVL0580-UPL0003-0055-1-120Lm/W	55W	6600 Lm	120 Lm/W	2800-6500K	1200x600x10 mm	6.8 Kg	Silver / White

Backlight LED Panels

- Up 160 Lm/W
- Italian Design
- Toshiba – Made in Japan Light Distributer

Part number	LED Power	Initial Flux	Light Efficiency	Dimension	Cut Out Dimension	Weight
DVL0551-UPL0003-0010-1-Ex	10W	1200 Lm	120 Lm/W	300x300x43 mm	285x285 mm	0.5 Kg
DVL0551-UPL0003-0015-1	15W	1500 Lm	100 Lm/W	300x300x43 mm	285x285 mm	0.5 Kg
DVL0551-UPL0003-0025-1	25W	2500 Lm	100 Lm/W	300x300x43 mm	285x285 mm	0.5 Kg
DVL0551-UPL0003-0025-1-Ex	25W	3000 Lm	120 Lm/W	300x300x43 mm	285x285 mm	0.5 Kg
DVL0551-UPL0001-0024-1	24W	3360 Lm	140 Lm/W	600x600x53 mm	585x585 mm	2.5 Kg
DVL0551-UPL0005-0036-1	36W	4320 Lm	120 Lm/W	600x600x53 mm	585x585 mm	2.5 Kg
DVL0551-UPL0008-0036-1	36W	5040 Lm	120 Lm/W	600x600x53 mm	585x585 mm	2.5 Kg
DVL0551-UPL0007-0040-1	40W	4800 Lm	140 Lm/W	600x600x53 mm	585x585 mm	2.5 Kg
DVL0551-UPL0001-0050-1-UGR<19	50W	5500 Lm	110 Lm/W	600x600x53 mm	585x585 mm	2.5 Kg
DVL0551-UPL0002-0050-1	50W	5000 Lm	120 Lm/W	1200x300x53 mm	1185x285 mm	2.4 Kg
DVL0551-UPL0009-0036-1-Ex	36W	5760 Lm	160 Lm/W	1200x300x53 mm	1185x285 mm	2.4 Kg

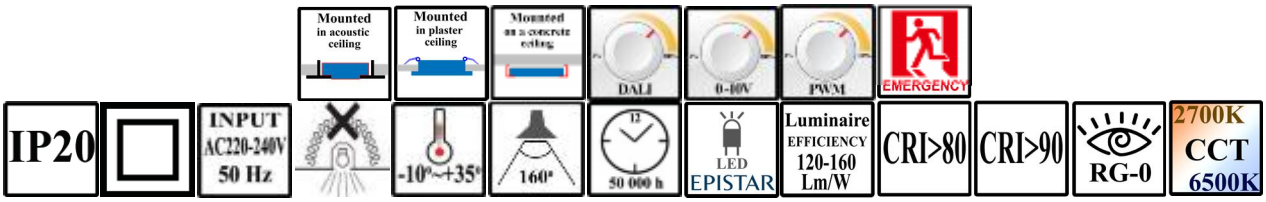

Stingray LED Panel Light

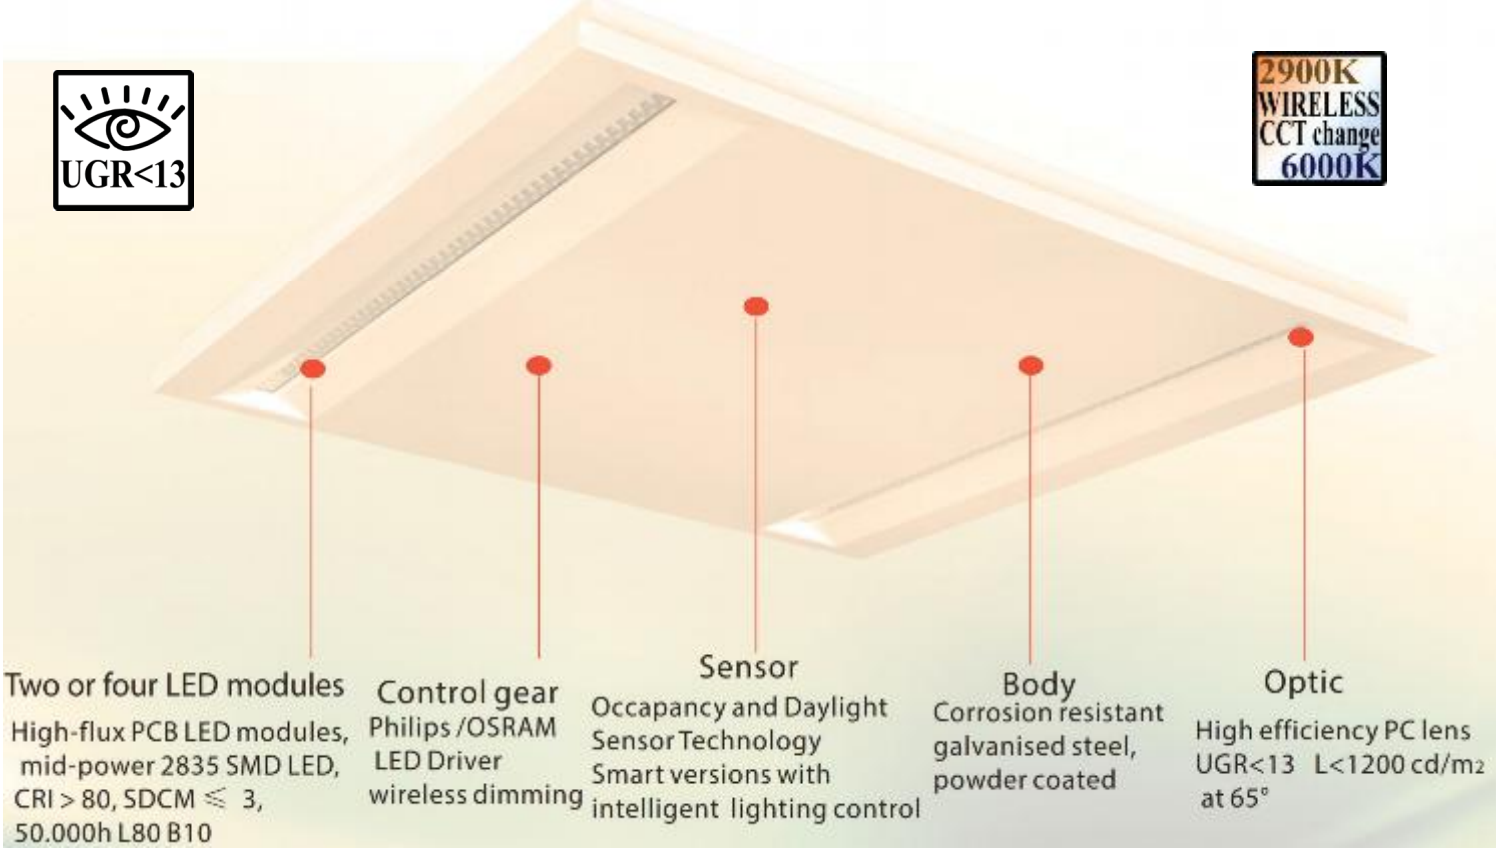

Part number	LED Power	Initial Flux	Light Efficiency	CCT	Dimming	Dimension
DVL0561-UPL0001-0030-1-UGR	30W	3600 Lm	120 Lm/W	Controllable - 2700-6500K	Dimmable	600x600x30 mm
DVL0561-UPL0002-0030-1-UGR	30W	3900 Lm	130 Lm/W	Controllable - 2700-6500K	Dimmable	600x600x30 mm
DVL0561-UPL0001-0036-1-UGR	36W	4300 Lm	120 Lm/W	Controllable - 2700-6500K	Dimmable	600x600x30 mm
DVL0561-UPL0002-0036-1-UGR	36W	4700 Lm	130 Lm/W	Controllable - 2700-6500K	Dimmable	600x600x30 mm
DVL0561-UPL0001-0045-1-UGR	45W	5200 Lm	120 Lm/W	Controllable - 2700-6500K	Dimmable	600x600x30 mm
DVL0561-UPL0002-0045-1-UGR	45W	5800 Lm	130 Lm/W	Controllable - 2700-6500K	Dimmable	600x600x30 mm
DVL0561-UPL0003-0030-1-UGR	30W	3900 Lm	130 Lm/W	Controllable - 2700-6500K	Dimmable	1200x300x30 mm
DVL0561-UPL0003-0036-1-UGR	36W	4700 Lm	130 Lm/W	Controllable - 2700-6500K	Dimmable	1200x300x30 mm



CCT changeable LED Panel Light

Type of panels

Classic side light panel

UGR low panel

Management methods

Easy switch

RF management

DALI (DT8) management

Part number	LED Power	Initial Flux	Light Efficiency	CCT	Dimming	Dimension
DVL0561-UPIL0001-0030-1-UGR	30W	3400 Lm	115 Lm/W	Controllable - 2700-6500K	Dimmable	600x600x30 mm
DVL0561-UPL0002-0030-1-UGR	30W	3600 Lm	120 Lm/W	Controllable - 2700-6500K	Dimmable	600x600x30 mm
DVL0561-UPL0001-0036-1-UGR	36W	4150 Lm	115 Lm/W	Controllable - 2700-6500K	Dimmable	600x600x30 mm
DVL0561-UPL0002-0036-1-UGR	36W	4400 Lm	120 Lm/W	Controllable - 2700-6500K	Dimmable	600x600x30 mm
DVL0561-UPL0001-0045-1-UGR	45W	5200 Lm	115 Lm/W	Controllable - 2700-6500K	Dimmable	600x600x30 mm
DVL0561-UPL0002-0045-1-UGR	45W	5400 Lm	120 Lm/W	Controllable - 2700-6500K	Dimmable	600x600x30 mm
DVL0561-UPL0003-0030-1-UGR	30W	3600 Lm	120 Lm/W	Controllable - 2700-6500K	Dimmable	1200x300x30 mm
DVL0561-UPL0003-0036-1-UGR	36W	4400 Lm	120 Lm/W	Controllable - 2700-6500K	Dimmable	1200x300x30 mm
DVL0534-UPL0003-0030-1-CCT	30W	3000 Lm	100Lm/W	Controllable - 2700-6500K	Dimmable	600x600x10 mm
DVL0534-UPL0003-0040-1-CCT	40W	4000 Lm	100Lm/W	Controllable - 2700-6500K	Dimmable	600x600x10 mm

IP20 | INPUT AC220-240V 50 Hz | PF>95 | -20°~+40° | LED EPISTAR | 50 000 h | CRI>90 | CRI>80 | 2700K CCT 6500K

Round Led Panels

Part number	LED Power	Initial Flux	LED	Dimension (D/H)	Cut Out Size
DVL0534-UPL0019-0012-1	12W	950 Lm	SMD 3528	170x15 mm	D-160 mm
DVL0534-UPL0020-0015-1	15W	1200 Lm	SMD 3528	195x15 mm	D-180 mm
DVL0534-UPL0021-0018-1	18W	1400 Lm	SMD 3528	225x15 mm	D-215 mm
DVL0534-UPL0022-0024-1	24W	1900 Lm	SMD 3528	300x15 mm	D-281 mm
DVL0534-UPL0023-0012-1-C	12W	950 Lm	SMD 3528	170x30 mm	Surface Mount
DVL0534-UPL0024-0018-1-C	18W	1350 Lm	SMD 3528	220x30 mm	Surface Mount
DVL0534-UPL0025-0024-1-C	24W	1600 Lm	SMD 3528	300x30 mm	Surface Mount



LED High Power Downlights

Part number	LED Power	Initial Flux	LED	Dimension (D/H)	Cut Out Size
DVL0565-UDL0001-0040-1	40W	3800 Lm	COB	"220x175 mm 169x175 mm"	D-200 mm D-150 mm
DVL0565-UDL0002-0060-1	60W	5800 Lm	COB	"220x175 mm 169x175 mm"	D-200 mm D-150 mm
DVL0565-UDL0003-0100-1	100W	9500 Lm	COB	"340x197 mm 270x197 mm"	D-300 mm D-250 mm

IP44 | INPUT AC95-265V 50/60 Hz MEAN WELL | PF>95 | LED BRIDGELUX | CRI>70 | CRI>80 | DALI | 0-10V | 40 000 h | 60° | WW-3000K W - 4000K DW-5000K CW-5700K

Dahlia LED Waterproof Downlight

Part number	LED Power	Initial Flux	LED	Dimension (D/H)	Cut Out Size
DVL0552-UDL0001-0018-1	18W	1660 Lm	SMD 3014	170x45 mm	D-145 mm
DVL0552-UDL0003-0018-1	18W	1550 Lm	SMD 3014	190x43 mm	D-165 mm
DVL0552-UDL0006-0018-1	18W	1750 Lm	SMD 3014	225x45 mm	D-205 mm
DVL0552-UDL0002-0025-1	25W	2450 Lm	SMD 3014	170x45 mm	D-145 mm
DVL0552-UDL0004-0025-1	25W	2350 Lm	SMD 3014	190x43 mm	D-165 mm
DVL0552-UDL0007-0025-1	25W	2500 Lm	SMD 3014	228x45 mm	D-205 mm
DVL0552-UDL0005-0035-1	35W	3350 Lm	SMD 3014	190x43 mm	D-165 mm
DVL0552-UDL0008-0035-1	35W	3500 Lm	SMD 3014	228x45 mm	D-205 mm
DVL0552-UDL0005-0035-1	45W	4100 Lm	SMD 3014	280x52 mm	D-230-260 mm

Aster LED Downlight

Part number	LED Power	Initial Flux	LED	Dimension (D/H)	Cut Out Size
DVL0551-UDL0001-0007-1	7W	560 Lm	SMD 3020	100x65 mm	D-90 mm
DVL0551-UDL0002-0012-1	12W	1200 Lm	SMD 3020	135x65 mm	D-125 mm
DVL0551-UDL0005-0012-1	12W	1400 Lm	SMD 3020	225x65 mm	D-210 mm
DVL0551-UDL0003-0018-1	18W	1800 Lm	SMD 3020	170x65 mm	D-160 mm
DVL0551-UDL0004-0022-1	22W	2200 Lm	SMD 3020	195x65 mm	D-185 mm
DVL0551-UDL0005-0030-1	30W	3000 Lm	SMD 3020	220x65 mm	D-210 mm
DVL0551-UDL0005-0030-1	30W	3000 Lm	SMD 3020	245x65 mm	D-230 mm
DVL0552-UDL0008-0035-1	35W	3500 Lm	SMD 3014	228x45 mm	D-205 mm



Premium LED Square Spot Light (tiltable)

Part number	LED Power	Power consumption	Initial Flux	Dimension (L/W/H)	Cut Out Size	Beam Angle
DVL0548-USP0020-0007-1	7W	8.5W	700-820 Lm	92x92x60mm	D-75 mm	25°/38°/55°
DVL0548-USP0021-0014-1	2*7W	17W	1400-1700 Lm	175x92x760 mm	155x75 mm	25°/38°/55°
DVL0548-USP0022-0021-1	3*7W	25.5W	2100-2500 Lm	247x92x760 mm	235x75 mm	25°/38°/55°
DVL0548-USP0023-0012-1	12W	14W	1150-1350 Lm	120x120x70 mm	D-95mm	20°/38°/60°
DVL0548-USP0024-0024-1	2*12W	28W	2300-2800 Lm	225x120x70 mm	200x95mm	20°/38°/60°
DVL0548-USP0025-0036-1	3*12W	42W	3500-4200 Lm	340x120x70 mm	310x95mm	20°/38°/60°

Premium LED Round Spot Light (tiltable)

Part number	LED Power	Power consumption	Initial Flux	Dimension (D/H)	Cut Out Size	Beam Angle
DVL0548-USP0010-0007-1	7W	8.5W	700-820 Lm	90x48 mm	D-75 mm	25°/38°/55°
DVL0548-USP0011-0012-1	12W	14W	1150-1350 Lm	110x70 mm	D-95 mm	20°/38°/60°
DVL0548-USP0012-0020-1	20W	23W	1900-2200 Lm	138x85 mm	D-120 mm	20°/38°/60°
DVL0548-USP0013-0030-1	30W	34.5W	3000-3500 Lm	160x105 mm	D-145 mm	20°/38°/60°

Premium LED Round Spot Light (tiltable/ultra-slim)

Part number	LED Power	Power consumption	Initial Flux	Dimension (D/H)	Cut Out Size	Beam Angle
DVL0548-USP0050-0007-1	7W	8.5W	700-820 Lm	96x48 mm	D75-85 mm	25°/38°/55°
DVL0548-USP0051-0012-1	12W	14W	1040-1350 Lm	96x63 mm	D75-85 mm	25°/38°/55°
DVL0548-USP0052-0012-1	12W	14W	1040-1350 Lm	120x75 mm	D95-110 mm	20°/38°/60°
DVL0548-USP0053-0020-1	20W	23W	1800-2150 Lm	120x75 mm	D95-110 mm	20°/38°/60°
DVL0548-USP0054-0020-1	20W	23W	1800-2150 Lm	150x90 mm	D125-140 mm	20°/38°/60°
DVL0548-USP0055-0030-1	30W	34.5W	3000-3600 Lm	150x90 mm	D125-140 mm	20°/38°/60°
DVL0548-USP0056-0030-1	30W	34.5W	3000-3600 Lm	180x105 mm	D145-170 mm	20°/38°/60°
DVL0548-USP0057-0040-1	40W	46W	3800-4600 Lm	180x105 mm	D145-170 mm	20°/38°/60°

IP20 IP54 INPUT AC100-277V 50/60 Hz INPUT AC220-240V 50 Hz -40°~+55° COB EPISTAR COB CREE COB CITIZEN 50 000 h DALI 0-10V Triac CRI>90 3000K CCT 4000K

Premium LED Round Spot Light (non-tiltable/ultra-slim)

Part number	LED Power	Power consumption	Initial Flux	Dimension (D/H)	Cut Out Size	Beam Angle
DVL0548-USP0070-0007-1	7W	8.5W	700-820 Lm	96x48 mm	D75-85 mm	25°/38°/55°
DVL0548-USP0071-0012-1	12W	14W	1040-1350 Lm	96x48 mm	D75-85 mm	25°/38°/55°
DVL0548-USP0072-0012-1	12W	14W	1040-1350 Lm	120x75 mm	D95-110 mm	15°/38°/60°
DVL0548-USP0073-0020-1	20W	24W	1800-2150 Lm	120x75 mm	D95-110 mm	15°/38°/60°
DVL0548-USP0074-0020-1	20W	24W	1800-2150 Lm	150x82 mm	D125-140 mm	15°/38°/60°
DVL0548-USP0075-0030-1	30W	34.5W	3000-3600 Lm	150x82 mm	D125-140 mm	15°/38°/60°
DVL0548-USP0076-0030-1	30W	34.5W	3000-3600 Lm	180x93 mm	D145-170 mm	20°/38°/60°
DVL0548-USP0077-0040-1	40W	46W	3800-4600 Lm	180x93 mm	D145-170 mm	20°/38°/60°

Premium LED Round Spot Light (ultra-slim/anti-glare/deep)

Part number	LED Power	Power consumption	Initial Flux	Dimension (D/H)	Cut Out Size	Beam Angle
DVL0548-USP0090-0007-1	7W	8.5W	610-720 Lm	96x68mm	D75-85 mm	25°/38°/50°
DVL0548-USP0091-0012-1	12W	14W	910-1120 Lm	96x68 mm	D75-85 mm	25°/38°/50°
DVL0548-USP0092-0012-1	12W	14W	910-1120 Lm	120x85 mm	D95-110 mm	25°/38°/50°
DVL0548-USP0093-0020-1	20W	24W	1730-1950 Lm	120x85 mm	D95-110 mm	25°/38°/50°
DVL0548-USP0094-0020-1	20W	24W	1730-1950 Lm	150x99 mm	D125-140 mm	22°/38°/55°
DVL0548-USP0095-0030-1	30W	34.5W	2800-3400 Lm	150x99 mm	D125-140 mm	22°/38°/55°
DVL0548-USP0096-0030-1	30W	34.5W	2800-3400 Lm	180x106 mm	D145-170 mm	20°/38°/55°
DVL0548-USP0097-0040-1	40W	46W	3600-4400 Lm	180x106 mm	D145-170 mm	20°/38°/55°

Premium LED Round Spot Light (honeycomb/anti-glare/ultra-slim)

Part number	LED Power	Power consumption	Initial Flux	Dimension (D/H)	Cut Out Size	Beam Angle
DVL0548-USP0110-0007-1	7W	8.5W	260-300 Lm	96x63mm	D75-85 mm	20°
DVL0548-USP0111-0012-1	12W	14W	585-715 Lm	96x63 mm	D75-85 mm	20°
DVL0548-USP0112-0012-1	12W	14W	585-715 Lm	120x75 mm	D95-110 mm	18°
DVL0548-USP0113-0020-1	20W	24W	780-810 Lm	120x75 mm	D95-110 mm	18°
DVL0548-USP0114-0020-1	20W	24W	780-810 Lm	150x86 mm	D125-140 mm	13°
DVL0548-USP0115-0030-1	30W	34.5W	1600-1950 Lm	150x86mm	D125-140 mm	13°
DVL0548-USP0116-0030-1	30W	34.5W	1600-1950 Lm	180x93 mm	D145-170 mm	13°
DVL0548-USP0117-0040-1	40W	46W	2100-2600 Lm	180x93 mm	D145-170 mm	13°

Premium LED Round Spot Light

Part number	LED Power	Power consumption	Initial Flux	Dimension (D/H)	Cut Out Size	Beam Angle
DVL0552-USP0018-0010-1	10W	10.5W	740-800 Lm	110x53mm	D90-100 mm	60°
DVL0552-USP0018-0013-1	13W	14W	960-1020 Lm	110x53mm	D90-100 mm	60°
DVL0552-USP0019-0018-1	18W	19W	1835-2070 Lm	145x65 mm	D120-130 mm	24°, 45°,60°
DVL0552-USP0019-0025-1	25W	26.5W	2250-2750 Lm	145x65 mm	D120-130 mm	24°, 45°,60°
DVL0552-USP0020-0008-1	8W	9W	650-750 Lm	190x75 mm	D160-170 mm	36°,60°
DVL0552-USP0020-0018-1	18W	19W	1850-2160 Lm	190x75 mm	D160-170 mm	36°,60°
DVL0552-USP0020-0025-1	25W	26.5W	2450-2875 Lm	190x75 mm	D160-170 mm	36°,60°
DVL0552-USP0020-0030-1	30W	33.5W	3360-3955 Lm	190x75 mm	D160-170 mm	36°,60°
DVL0552-USP0020-0040-1	40W	44W	3600-4240 Lm	190x75 mm	D160-170 mm	36°,60°
DVL0552-USP0021-0018-1	18W	19W	1850-2160 Lm	225x75 mm	D200-210 mm	24°,36°,60°
DVL0552-USP0021-0025-1	25W	26.5W	2450-2875 Lm	225x75 mm	D200-210 mm	24°,36°,60°
DVL0552-USP0021-0030-1	30W	33.5W	3360-3955 Lm	225x75 mm	D200-210 mm	24°,36°,60°
DVL0552-USP0021-0045-1	45W	48W	3870-4770 Lm	225x75 mm	D200-210 mm	24°,36°,60°



Premium LED Waterproof Spot Light

Part number	LED Power	Initial Flux	LED	Dimension	Cut Out Size	Beam Angle	Shape
DVL0552-USP0002-0008-1	8W	600 Lm	COB	D68xH50 mm	D-71 mm	24° / 36° / 60°	Round
DVL0552-USP0017-0008-1	8W	590 Lm	COB	L78xW78xH50 mm	D-71 mm	24° / 36° / 60°	Square
DVL0552-USP0001-0010-1	10W	770 Lm	COB	D95xH55 mm	D-95 mm	15° / 24° / 36° / 60°	Round

LED Spot Light (DOT series)

Part number	LED Power	Initial Flux	LED	Dimension	Cut Out Size	Beam Angle	Shape
DVL0599-USP0001-0003-1	3W	160 Lm	COB	D40xH40.4 mm	D-35mm	15°/20°/30°/40°	Round

IP20 | INPUT AC220-240V 50 Hz | -10°~+35° | COB OSRAM | 40 000 h | CRI>90 | 2700K CCT 4000K

Clover LED Spot Light

Part number	LED Power	Initial Flux	LED Moduls	Dimension (L / W / H)	Cut Out Size	Remarks
DVL0552-USP0030-0008-1	8W	460-550 Lm	COB 8W	100x100x135 mm	85x85 mm	
DVL0552-USP0036-0008-1	8W	460-550 Lm	COB 8W	155.5x83.5x134 mm	86x86 mm	Trimless
DVL0552-USP0033-0012-1	12W	820-980 Lm	COB 12W	130x130x155 mm	115x115 mm	
DVL0552-USP0039-0012-1	12W	820-980 Lm	COB 12W	185x113x154 mm	116x116 mm	Trimless
DVL0552-USP0031-0016-1	16W	1040-1250 Lm	COB 8Wx2	180x100x135 mm	165x85 mm	
DVL0552-USP0037-0016-1	16W	1040-1250 Lm	COB 8Wx2	235.5x83.5x134 mm	167x86 mm	Trimless
DVL0552-USP0034-0024-1	24W	1600-2040 Lm	COB 12Wx2	239x130x155 mm	224x115 mm	
DVL0552-USP0040-0024-1	24W	1600-2040 Lm	COB 12Wx2	294x113x154 mm	228x116 mm	Trimless
DVL0552-USP0032-0024-1	24W	1550-1700 Lm	COB 8Wx3	260x100x135 mm	245x85 mm	
DVL0552-USP0038-0024-1	24W	1550-1700 Lm	COB 8Wx3	315.5x83.5x134 mm	247x86 mm	Trimless
DVL0552-USP0035-0036-1	36W	2200-2700 Lm	COB 12Wx3	349x130x155 mm	334x115 mm	
DVL0552-USP0041-0036-1	36W	2200-2700 Lm	COB 12Wx3	404x113x154 mm	338x116 mm	Trimless

Grill LED Spot Light

Part number	LED Power	Initial Flux	LED	Dimension (L/W/H)	Cut Out Size (L/W)	Remarks
DVL0585-USP0004-0015-1	15W	1200 Lm	COB 15W	160x160x163 mm	145x145 mm	
DVL0585-USP0001-0025-1	25W	2250 Lm	COB 25W	190x190x173 mm	170x170 mm	Trimless
DVL0585-USP0005-0030-1	30W	2700 Lm	2xCOB 15W	320x160x163 mm	305x145 mm	
DVL0585-USP0002-0050-1	50W	4500 Lm	2xCOB 25W	375x190x173 mm	355x170 mm	Trimless
DVL0585-USP0006-0045-1	45W	3900 Lm	3xCOB 15W	462x160x163 mm	450x145 mm	
DVL0585-USP0003-0075-1	75W	6750 Lm	3XCOB 25W	538x190x173 mm	520x170 mm	Trimless

Jupiter LED Spot Light

Part number	LED Power	Initial Flux	Dimension (D/H)	Cut Out Size	Beam Angle
DVL0552-USP0050-0010-1	10W	700-800 Lm	96x68 mm	D-85-90 mm	15° / 24°
DVL0552-USP0053-0015-1	15W	1060-1290 Lm	145x102 mm	D-120-130mm	15°/24°/36°/60°
DVL0552-USP0054-0020-1	20W	1840-2100 Lm	145x102 mm	D-120-130mm	15°/24°/36°/60°
DVL0552-USP0051-0035-1	35W	3150-3550 Lm	180x129 mm	D-165-170 mm	24° / 45° / 60°
DVL0552-USP0052-0045-1	45W	3900-4350 Lm	180x129 mm	D-165-170 mm	24° / 45° / 60°

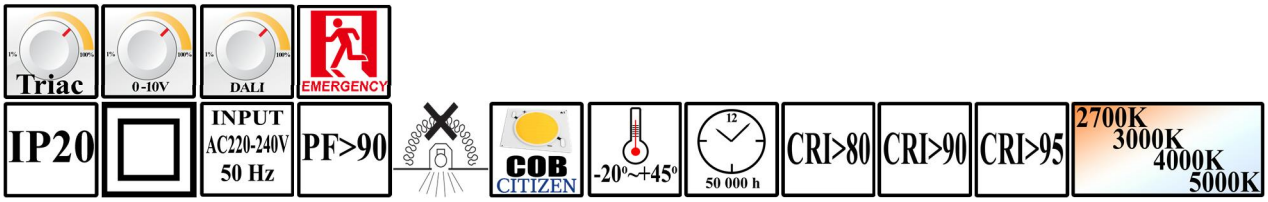

LED Profresh Light

LED Profresh Linear

Practical plug&play solution

Safety plug installation

Connecting lead

Including assembling clip

Expandable up to 7 Meter

Optional varable clip

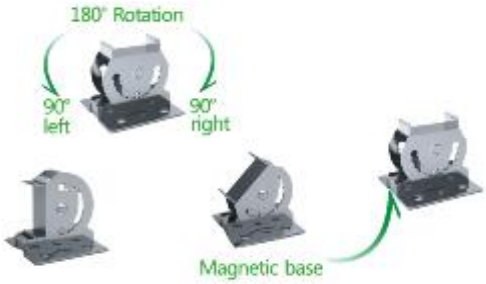

Part number	LED Pow-er	Initial Flux	LED	Dimension (L/W/H)	Color Options
DVL0558-ULI0001-0004-3	4W	340 Lm	36 x SMD 3014	260x20x15 mm	Bak-ery Meat Deli Green
DVL0558-ULI0002-0009-3	9W	765 Lm	78 x SMD 3014	560x20x15 mm	
DVL0558-ULI0003-0013-3	13W	1100 Lm	108 x SMD 3014	860x20x15 mm	
DVL0558-ULI0004-0018-3	18W	1500 Lm	144 x SMD 3014	1160x20x15 mm	
DVL0558-ULI0005-0022-3	22W	1800 Lm	180 x SMD 3014	1460x20x15 mm	

IP20 III INPUT DC 24V -20°~+40° LED EPISTAR 140° 30 000 h

LED Profresh High Bay

Part number	LED Power	Initial Flux	LED	Dimension (D/H)	Color Options
DVL0558-UHB0001-0010-1	10W	750 Lm	COB	205x175 mm	Bak-ery Meat Deli Green
DVL0558-UHB0002-0020-1	20W	1400 Lm	COB	220x210 mm	
DVL0558-UHB0003-0030-1	30W	2050 Lm	COB	325x250 mm	
DVL0558-UHB0004-0030-1	30W	2100 Lm	COB	292x286 mm	
DVL0558-UHB0005-0040-1	40W	3200 Lm	COB	316x362 mm	



Production
Planning
Service
Divo
360°
Project
Escorting
Installation
Financing

Divolight Israel –Headquarters
4th Ha-Tsoran St., New Industrial Zone Poleg
Netanya, Israel 4250604
sales@divolight.co.il
Tel:+972722555805

Divolight UK – Main Europe Branch
Unit 79 Basepoint Business Centre, Crawley
West Sussex, RH11 7XX, UK
guy@divolight.co.uk
Tel:+4401293813869

Divolight Russia – Agency
moscow@divolight.ru
Tel: +796 50215121

Divolight USA–Agency
usa@divolight.com
Tel:+17324853488

Divolight Hong Kong–QA Branch hk@divolight.com
Tel:+862089379580

www.divolight.com