


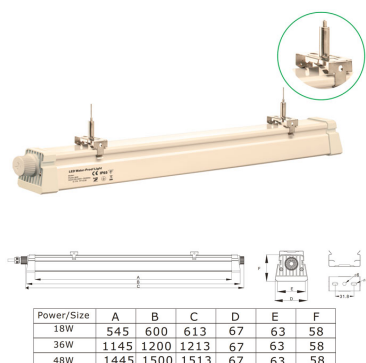

Installation	Pendant / Surface Mounted
Power Consumption (+ -5%)	18 / 36 / 48 W
LED Module	Epistar SMD / Philips SMD
Luminous Flux	2000 / 4000 / 5300 lm
CCT (Correlated Color Temperature)	2700-6500 K
CRI (Color Rendering Index)	>80
Luminor Efficiency	120 lm/W
Beam Angle	120°
Reflection Type	Transparent / Milky Diffuser
Input Voltage	100-277 V
Power Factor	>95
Ambient Temperature Range	-20°~+45°
Dimming	Optional
Mech.Impact Protection Code	IK08
Ingress Protection Code	IP65
LED Lifespan	>50,000 Hours
Weight	0.85 / 1.4 / 1.68 KG
Dimensions	600 / 1200 / 1500x67x58 mm