


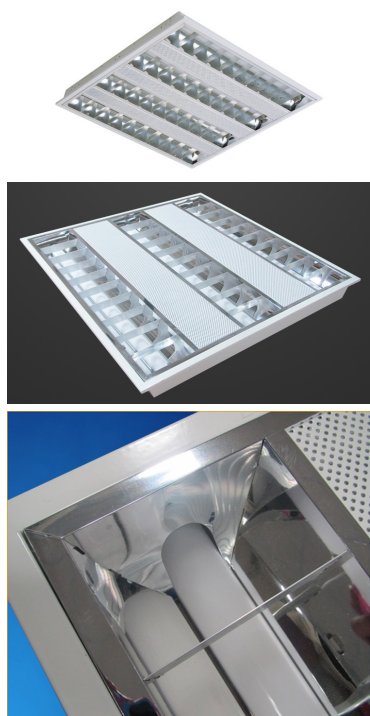

Installation	Pendant / Surface Mounted / Acoustical Ceiling
Power Consumption (+-5%)	20 / 30 / 40 W
LED Module	Epistar SMD
Luminor Efficiency	120 lm/W
CCT (Correlated Color Temperature)	2700-6500 K
CRI (Color Rendering Index)	>80
Beam Angle	120°
Input Voltage	100-277 V
Power Factor	>95
Ambient Temperature Range	-10°~+35°
Dimming	Optional - Dali / 0-10V / PWM
Ingress Protection Code	IP20
LED Lifespan	> 60,000 Hours
Color	Aluminium White
Weight	3.2 KG
Dimensions	598x598x50 mm
Glare Rating	UGR<19